



WORK PROPOSAL

Proposal No.: JRG-2026-008

Structural & Ornamental Welding · Aluminum · Steel · Stainless · Exterior Renovation

Date: **September 11, 2026**

13796 SW 139 Ct, Miami, FL 33186 · (786) 590-8986 · [\[Email\]](#) · Lic. [\[License #\]](#)

Valid for: **30 days**

PREPARED FOR

Client: **Raul** [\[Last Name\]](#)

Project Address: **18398 131st Trail N, Jupiter Farms, FL**

Phone / Email: [\[Client Contact\]](#)

PROJECT

Two (2) free-standing open carport structures in welded structural aluminum with galvanized steel roof deck:

Carport A — 24' × 25' (two vehicles) and **Carport B — 16' × 20'** (compact tractor).

1. DESIGN CONCEPT


Both structures are open-sided (no walls), fully welded **structural aluminum frames** — no rust, no rot, no painting ever required — covered with **galvanized steel roof deck** mechanically fastened to the frame. Each column is shop-welded to a heavy gusseted base plate and anchored to its own concrete footing with **Hilti stainless screw-in concrete anchors** (threaded directly into the concrete — no expansion anchors), keeping the structures completely open and clean with no diagonal bracing. Roofs are single-slope (approx. 1 : 12) for positive drainage.

Carport A is designed per the owner's request with **no intermediate posts and no interior columns** — the full 24-foot width is spanned by deep aluminum girders (3"×12"), leaving both parking bays completely unobstructed.

2. CARPORT A — 24' × 25' (TWO VEHICLES)


- **Columns:** Eight (8) aluminum posts 4"×4"×1/4" 6061-T6 — four per side, aligned under each roof girder; **no posts at front, rear, or interior**. Clear height approx. 9'-0" at the high side, sloping to approx. 7'-0".
- **Roof girders:** Four (4) aluminum girders **3"×12"×0.188" 6005A-T61**, spanning the full 24' width (front, rear, and two intermediate at 8'-4" on center), through-bolted to the columns with stainless hardware.
- **Perimeter side beams:** 3"×6"×3/16" 6061-T6 continuous along both 25' sides, closing the perimeter frame and tying all columns together.
- **Roof deck:** Galvanized steel roof deck, **1-1/2" Type B, 18 gauge**, in continuous full-length sheets over three spans with a 1'-0" roof overhang on all sides, fastened at every support with 1/4"-14 self-drilling fasteners and stitched at side laps.
- **Foundations:** Eight (8) concrete footings **2'-0" × 2'-0" × 3'-0" deep**, poured flush with grade; each column shop-welded to a **10"×10"×1/2" gusseted base plate** anchored with **(4) Hilti KWIK HUS-EZ stainless screw-in concrete anchors** (no expansion anchors).

DWG-1 · CARPORT A — FOUNDATION & ROOF FRAMING PLAN (24' × 25')

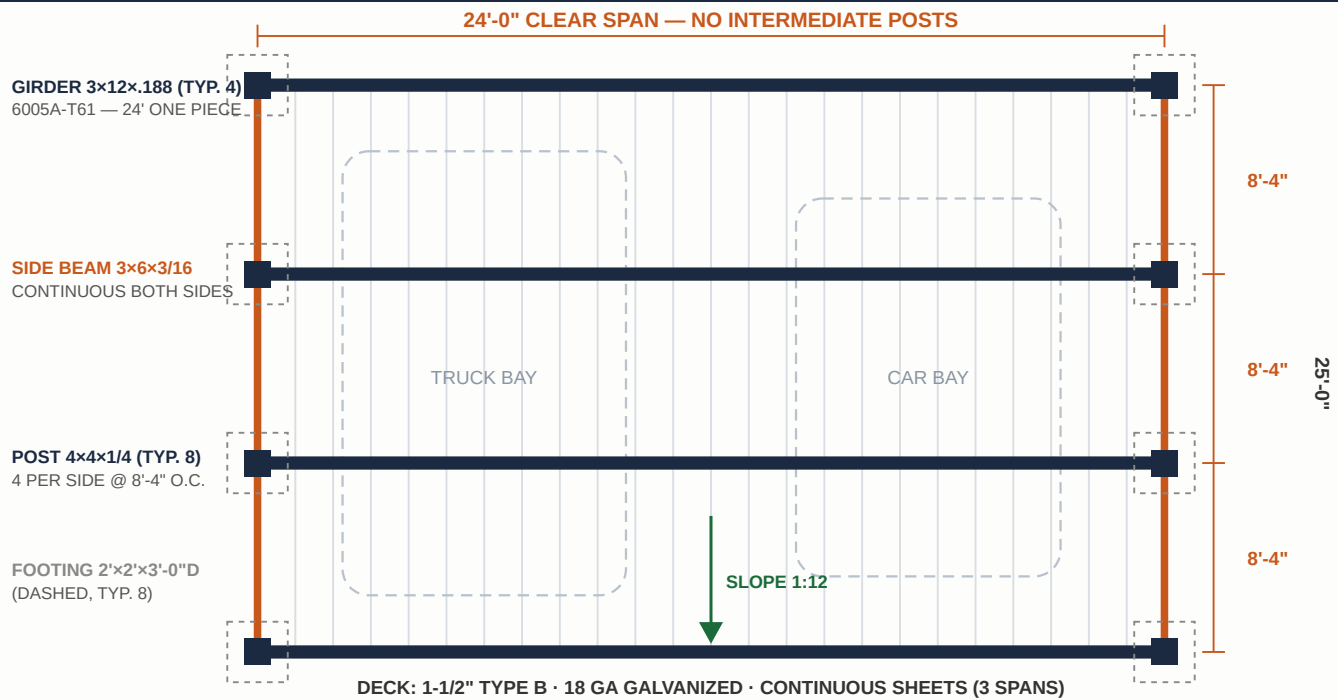

Both parking bays fully unobstructed — all columns on the two sides only. Deck ribs run in the slope direction for drainage.

DWG-2 · CARPORT A — SIDE ELEVATION & FOOTING DETAIL

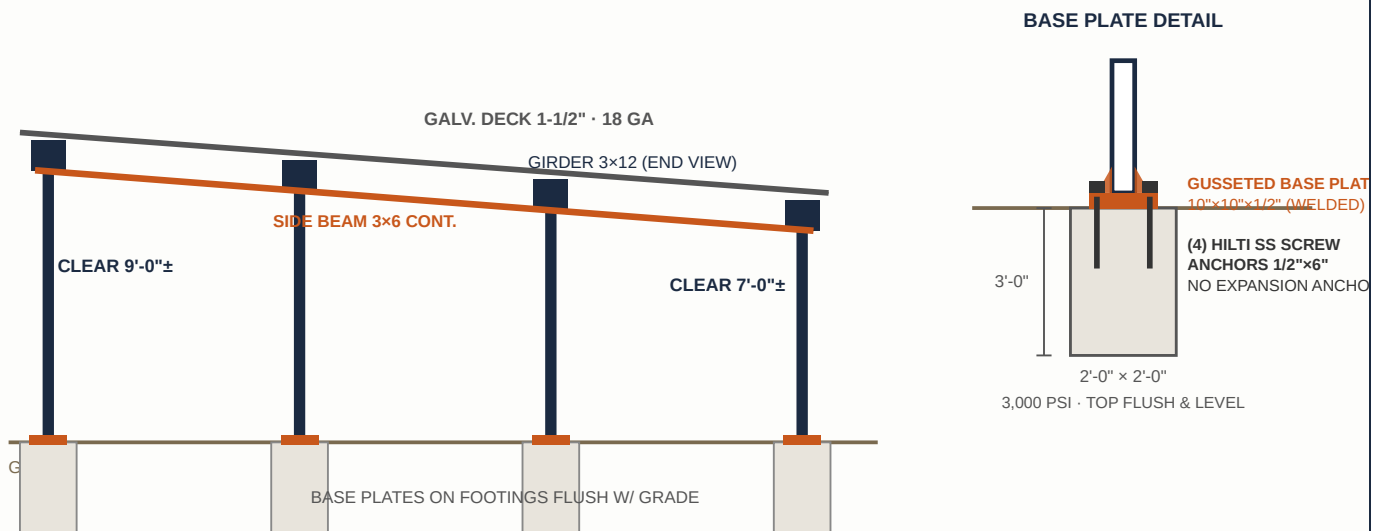


Single-slope roof approx. 1:12. Columns embedded 3'-0" in 2'×2'×3' concrete footings with stainless cross-pin anchors — wind resistance without diagonal bracing.

3. CARPORT B — 16' × 20' (TRACTOR)

- Columns:** Six (6) aluminum posts 3"×3"×1/4" 6061-T6, three per side at 10'-0" on center. **Clear height approx. 10'-0"** at the entry side (full ROPS clearance), sloping to approx. 8'-4".
- Side beams:** 3"×6"×3/16" 6061-T6 continuous along both 20' sides.

- **Rafters:** Six (6) aluminum rafters 2"x6"x3/16" spanning the 16' width at 4'-0" on center.
- **Roof deck:** Galvanized steel deck, **1" profile, 22 gauge**, full-length sheets with a 1'-0" roof overhang on all sides, self-drilling fasteners at every support.
- **Foundations:** Six (6) concrete footings 2'-0" x 2'-0" x 3'-0" deep, poured flush with grade; columns on **8"x8"x3/8" gusseted base plates** with (4) Hilti stainless screw-in anchors each — same system as Carport A.

DWG-3 · CARPORT B — FRAMING PLAN & END ELEVATION (16' x 20')

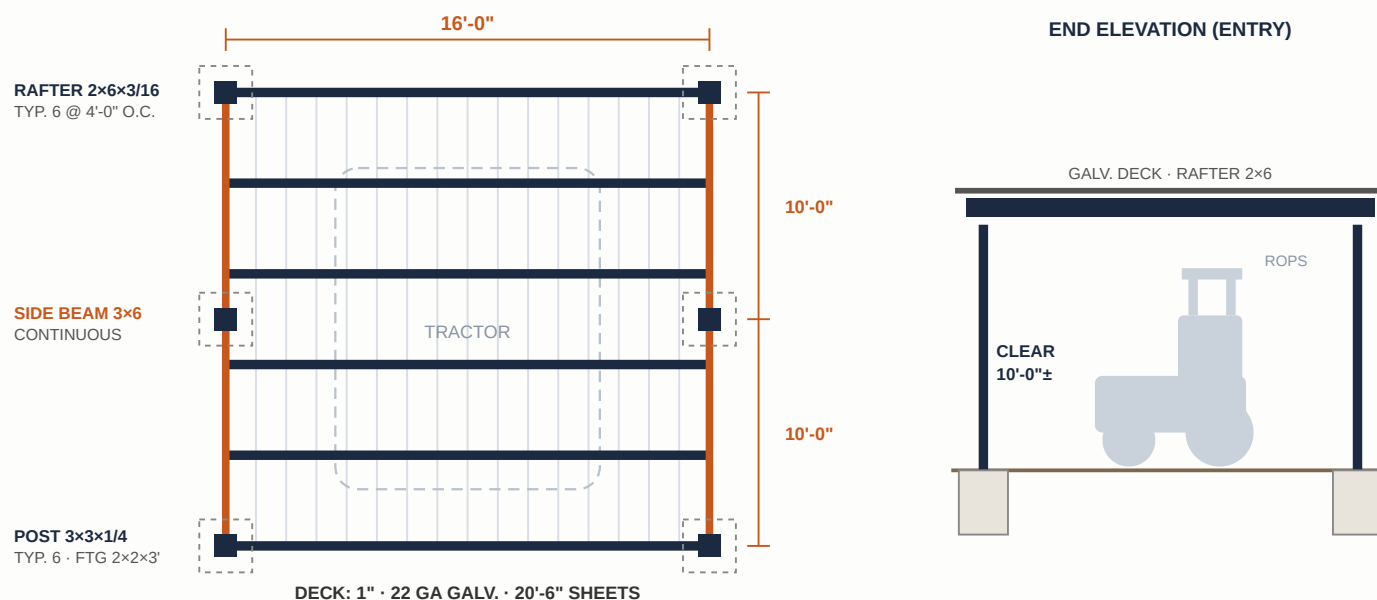

Full 10' clear entry height for tractor with roll bar (ROPS) raised. Slope 1:12 front to rear.

4. SCOPE OF WORK (BOTH STRUCTURES)

1. **Layout & excavation:** Stake both structures, excavate fourteen (14) footings 2'x2'x3'-0" deep.
2. **Fabrication:** Cut and weld all aluminum framing (certified aluminum welding); girders and beams drilled for stainless through-bolt connections; columns shop-welded to gusseted base plates.
3. **Erection & concrete:** Pour 3,000 psi concrete footings flush with grade, tops smooth and level; after cure, set columns plumb on their base plates and anchor with Hilti stainless screw-in concrete anchors; install girders, side beams and rafters.
4. **Roofing:** Install galvanized deck with self-drilling fasteners at every support and side-lap stitching; edges finished clean — no sharp exposed corners.
5. **Closeout:** Site cleanup, haul-away of spoils and debris, final walkthrough with owner.

5. PRICE

Item	Amount
Carport A — 24' × 25' two-vehicle open carport: welded structural aluminum frame (8 posts 4×4, four 3×12 clear-span girders, perimeter beams), 18 ga galvanized Type B roof deck, eight 2'×2'×3' concrete footings — materials & labor, turnkey	\$ 17,500.00
Carport B — 16' × 20' tractor shelter: welded structural aluminum frame (6 posts, side beams, 2×6 rafters), 22 ga galvanized roof deck, six 2'×2'×3' concrete footings, 10' clear	\$ 9,500.00

entry — materials & labor, turnkey	
TOTAL — BOTH STRUCTURES, MATERIALS & LABOR	\$ 27,000.00

6. TERMS & CONDITIONS

- **Payment: 50% deposit** (\$13,500.00) to schedule and order material; balance due upon completion and owner walkthrough.
- **Schedule:** Approx. two (2) to three (3) weeks, weather permitting.
- **Warranty:** One (1) year on workmanship; aluminum and galvanized deck are maintenance-free — no painting required, ever.
- **Exclusions:** Building permit fees and sealed engineering drawings (by owner, if required); electrical or lighting; concrete slab, paving or site grading under the structures; gutters and downspouts (available by change order); relocation of underground utilities if encountered.
- Final structure locations and orientations to be field-verified and confirmed with owner before excavation.
- Any additional work will be quoted and approved in writing before proceeding (change order).

JRG Welding Corp — Authorized Signature / Date


Client Acceptance — Signature / Date

DESIGN VIEW · CARPORT A

Two-Vehicle Aluminum Carport



Prepared for **Raul** · 18398 131st Trail N, Jupiter Farms, FL
Ref. Proposal JRG-2026-008 · September 2026

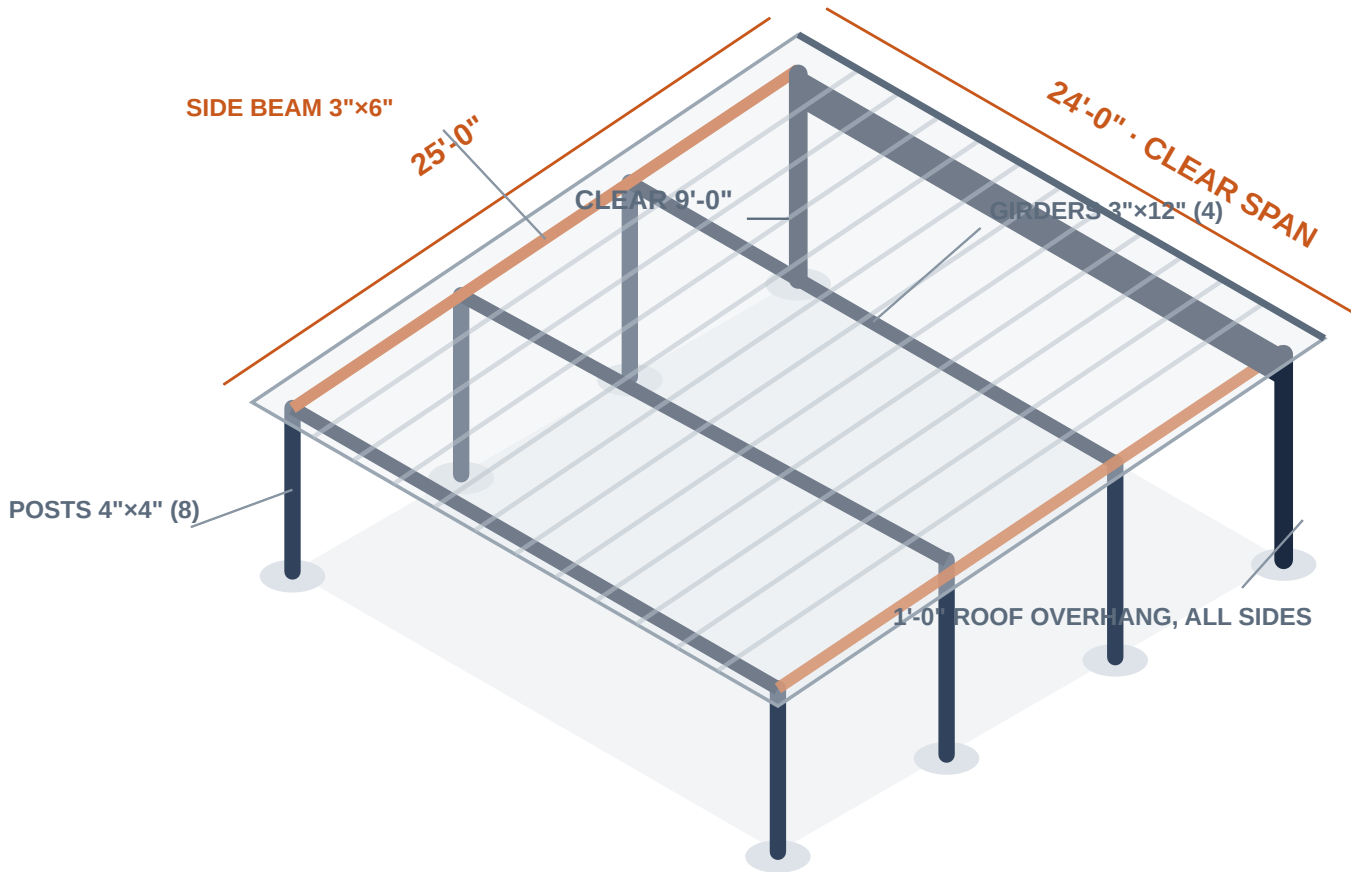


24' × 25' FOOTPRINT	2 Bays FULLY OPEN — NO CENTER POSTS	9'-0" CLEAR HEIGHT AT ENTRY	1 : 12 ROOF SLOPE · POSITIVE DRAINAGE
Welded Aluminum Structure Never rusts, never rots, never needs paint — clean mill finish for life.	Clear-Span Design Deep 12" aluminum girders span the full 24 ft — nothing between your vehicles.	Galvanized Steel Roof Heavy-gauge structural roof deck, mechanically fastened, built for Florida weather.	Bolted Base Plates Each column on a welded base plate, anchored to its concrete footing with Hilti stainless screw anchors.

DESIGN VIEW · CARPORT B


Aluminum Tractor Shelter



Prepared for **Raul** · 18398 131st Trail N, Jupiter Farms, FL
Ref. Proposal JRG-2026-008 · September 2026

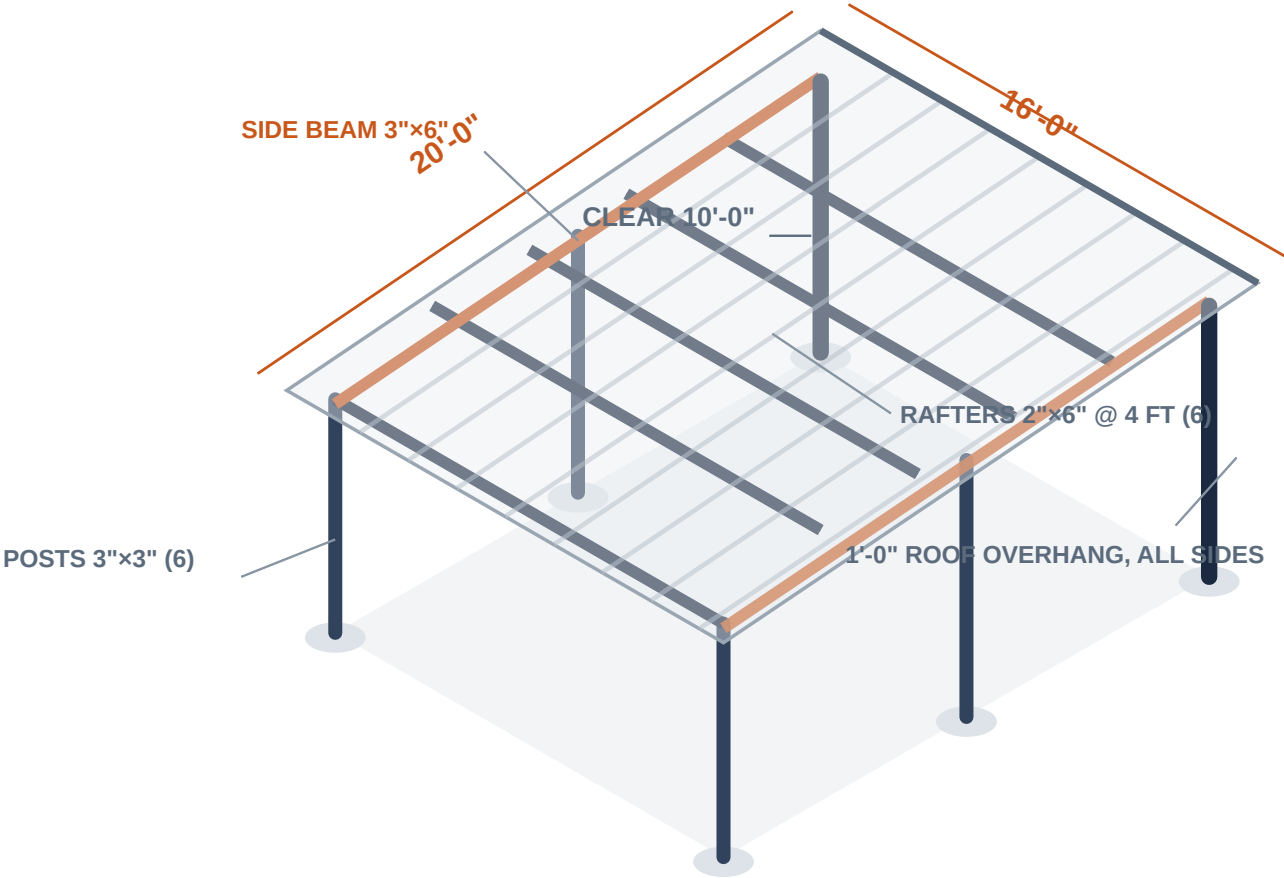

16' × 20' FOOTPRINT	10'-0" CLEAR ENTRY — ROLL BAR UP	6 Posts ALL ON THE SIDES · OPEN ENTRY	1 : 12 ROOF SLOPE · POSITIVE DRAINAGE
Welded Aluminum Structure Never rusts, never rots, never needs paint — clean mill finish for life.	Full Tractor Clearance 10 ft clear at the entry — drive in with the roll bar (ROPS) fully raised.	Galvanized Steel Roof Structural roof deck in full- length sheets, mechanically fastened.	Bolted Base Plates Each column on a welded base plate, anchored to its concrete footing with Hilti stainless screw anchors.



Sheet: **DWG-A · Carport A**
Ref.: Proposal **JRG-2026-008**
Date: **September 11, 2026**

PROJECT Two-Vehicle Open Carport — 24'-0" x 25'-0"	LOCATION 18398 131st Trail N, Jupiter Farms, FL	CLIENT Raul	SCALE N.T.S.
--	---	-----------------------	------------------------

24'-0" CLEAR SPAN

G1-G4: GIRDER
3x12x.188 · 6005A-T61
 24'-0" ONE PIECE, NO SPLICE

SB1-SB2: SIDE BEAM
3x6x3/16 · 6061-T6
 CONTINUOUS, 25'-0"

P1-P8: POST 4x4x1/4
 6061-T6 · 4 PER SIDE
 @ 8'-4" O.C.

FOOTING 2'x2'x3'-0"D
 TYP. 8 — SEE DETAIL 4

SLOPE 1:12

ROOF DECK: 1-1/2" TYPE B · 18 GA · G90 · (9) SHEETS x 27'-0" CONTINUOUS — 1'-0" OVERHANG ALL SIDES — RIBS RUN WITH SLOPE


All columns on the two 25' sides only — both 12' parking bays fully unobstructed. Circled numbers reference connection details below.

The diagram illustrates a deck railing system with the following components and specifications:

- Deck Surface:** Labeled "DECK 1-1/2" TYPE B 18 GA".
- Top Rail:** Labeled "G3 3x12 (END)".
- Intermediate Rail:** Labeled "SB 3x6 CONT." (Solid Bronze).
- Posts:** Four vertical posts are shown. The first post is labeled "1" in a red circle. The fourth post is labeled "4" in a red circle.
- Clearance:** The distance between the first and second posts is labeled "CLEAR 9'-0"±". The distance between the third and fourth posts is labeled "CLEAR 7'-0"±".
- Base Plates:** Labeled "BASE PLATES ON FOOTINGS FLUSH W/ GRADE — DET".
- Ground Level:** Indicated by a horizontal line labeled "GR".
- Post Heights (A.F.G.):**
 - P1/P5 (front): 9'-0"
 - P2/P6: 8'-4"
 - P3/P7: 7'-8"
 - P4/P8 (rear): 7'-0"
- Cut Post Stock:** Labeled "CUT POST STOCK 12'-6"
- Field-Trim:** Labeled "FIELD-TRIM TO GRADE"


Single slope 1:12 front to rear. Girders level side-to-side; deck ribs drain front to rear.

DETAIL 1 · GIRDER-TO-POST CONNECTION

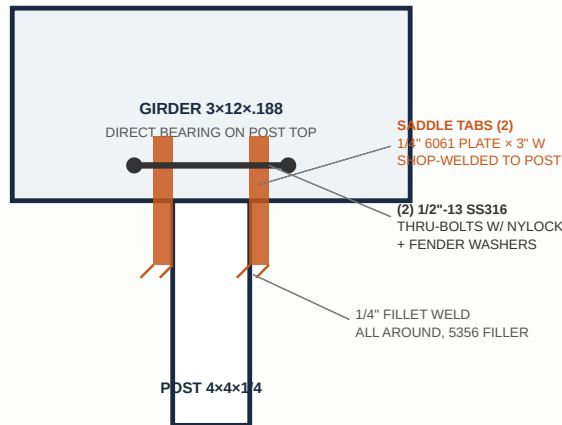

Girder bears on post top (gravity); saddle tabs + thru-bolts resist wind uplift. Typ. 8 locations.


DETAIL 2 · SIDE BEAM AT POST (PLAN SECTION)

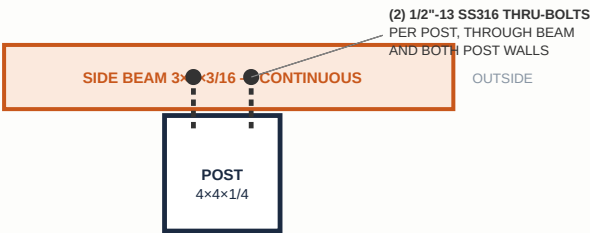

SIDE BEAM RUNS ON OUTSIDE FACE OF ALL 4 POSTS, TOP FLUSH WITH GIRDER BEARING — TIES COLUMN LINE, 25'-0" ONE PIECE (SPlice OVER POST PERMITTED, INTERNAL SLEEVE 12" + (4) 3/8" SS BOLTS)

Typ. 8 locations (4 per side). All bolt holes drilled 1/16" oversize, deburred.


DETAIL 3 · DECK FASTENING (SECTION AT GIRDER)

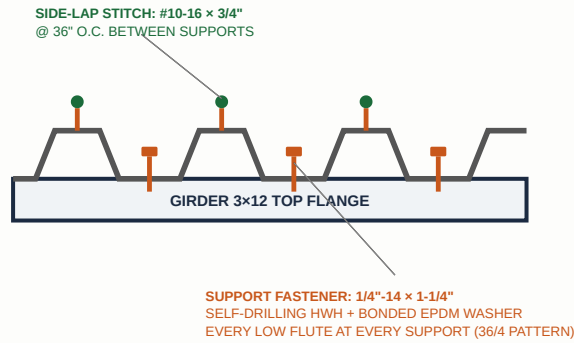

DECK: 1-1/2" TYPE B · 18 GA · G90 GALVANIZED · SHEETS CONTINUOUS OVER 3 SPANS

Perimeter zone: fastener in EVERY flute. Field: every flute at supports per HVHZ practice.

DETAIL 4 · FOOTING & BASE PLATE ANCHORAGE

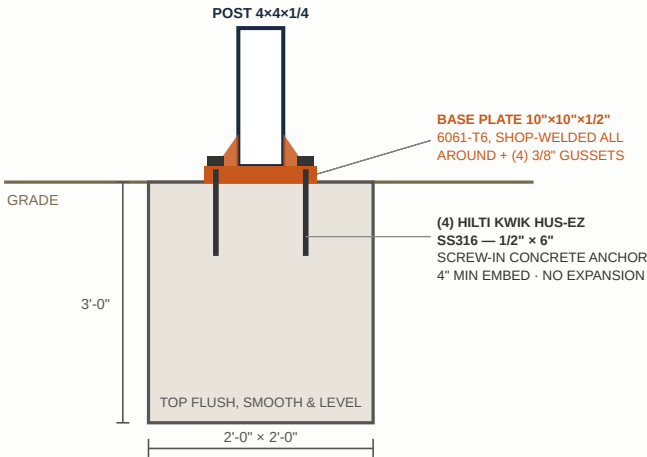

3,000 psi footing poured flush with grade; anchors installed after cure (min 7 days). Typ. 8.

BILL OF MATERIALS — CARPORT A

Mark	Member	Section	Alloy	Length	Qty
P1–P8	Column	4" × 4" × 1/4" sq. tube	6061-T6	12'-6" (field-trim)	8
G1–G4	Roof girder (clear span)	3" × 12" × 0.188" rect. tube	6005A-T61	24'-0"	4
SB1–SB2	Side beam (continuous)	3" × 6" × 3/16" rect. tube	6061-T6	25'-0"	2
—	Saddle tabs (Detail 1)	1/4" plate, 3" × 6"	6061-T6	—	16
—	Roof deck	1-1/2" Type B, 18 ga, G90 galv.	Steel	27'-0" (3'-0" cov.)	9
—	Footing concrete, 3,000 psi	2'-0" × 2'-0" × 3'-0"	—	0.45 CY each	8

FASTENER SCHEDULE — CARPORT A

Location	Fastener	Qty / Spacing
----------	----------	---------------


Girder to post (Detail 1)	1/2"-13 × 5-1/2" SS316 hex bolt, nylock nut, fender washers	2 per post · 16 total
Side beam to post (Detail 2)	1/2"-13 SS316 thru-bolt, nylock nut, fender washers	2 per post · 16 total
Deck to girders (Detail 3)	1/4"-14 × 1-1/4" self-drilling HWH, bonded EPDM washer	Every low flute at every support
Deck side laps	#10-16 × 3/4" stitch screw	36" o.c. between supports
Base plate anchors (Detail 4)	Hilti KWIK HUS-EZ SS316, 1/2" × 6" screw-in concrete anchor (no expansion), 4" min embed	4 per plate · 32 total

GENERAL NOTES

- All aluminum welding with 5356 filler by certified aluminum welder; 1/4" fillet welds unless noted.
- All bolts, nuts, washers and anchor rods stainless steel Type 316. Bolt holes 1/16" oversize, deburred.
- Galvanized deck bearing directly on aluminum is a compatible (zinc) contact; all deck cut edges touched up with cold-galvanizing compound.
- Footing tops poured flush with grade, smooth and level. Anchors installed into cured concrete (3,000 psi, min 7 days) with Hilti-specified bit and torque — screw-in anchors only, no expansion anchors. Isolation barrier (bituminous paint or membrane pad) between aluminum plate and concrete.
- Layout, post locations and final grades field-verified with owner before excavation. Roof deck overhangs the frame 1'-0" on all four sides. Deck sheet lengths confirmed against as-built frame before ordering.
- Structure designed as open (no walls). Do not enclose sides without review — wind loads change.


PROJECT Tractor Shelter — 16'-0" x 20'-0"	LOCATION 18398 131st Trail N, Jupiter Farms, FL	CLIENT Raul	SCALE N.T.S.
--	--	----------------	-----------------

B-1 · FOUNDATION & ROOF FRAMING PLAN

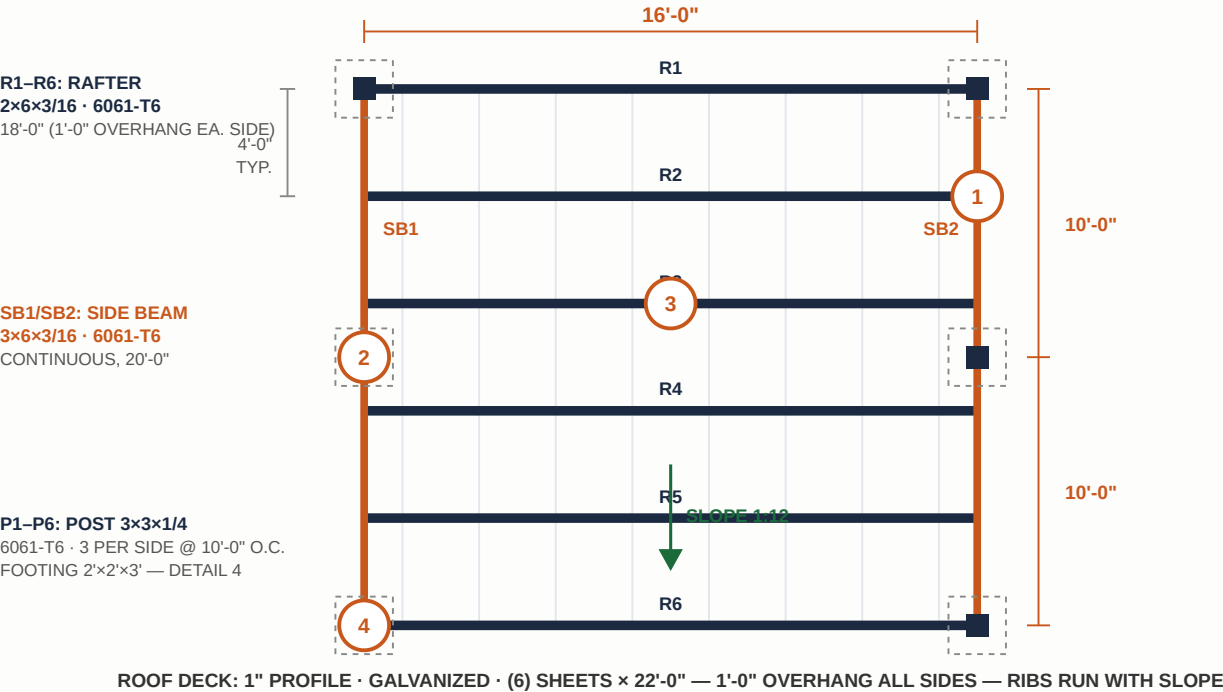


Entry at front (high) end — 10'-0" clear for tractor ROPS. Circled numbers reference details below.

B-2 · SIDE ELEVATION

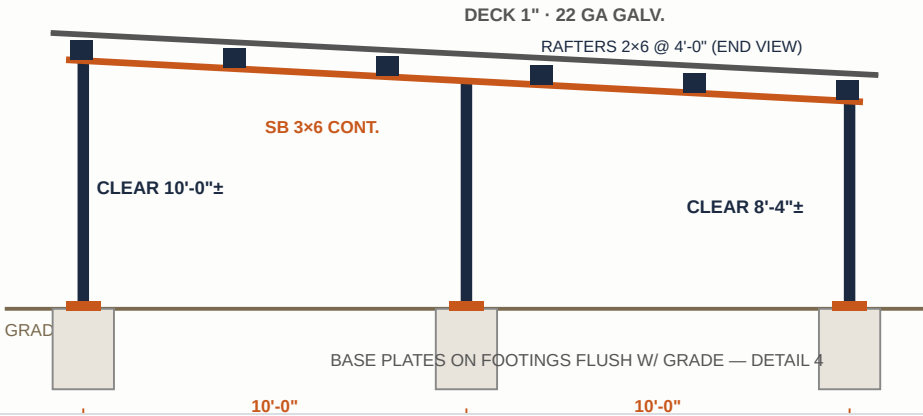

Single slope 1:12 front to rear. Post heights above grade: front 10'-0", middle 9'-2", rear 8'-4" (cut from 13'-6" stock, field-trim).


DETAIL 1 · RAFTER-TO-SIDE BEAM CONNECTION

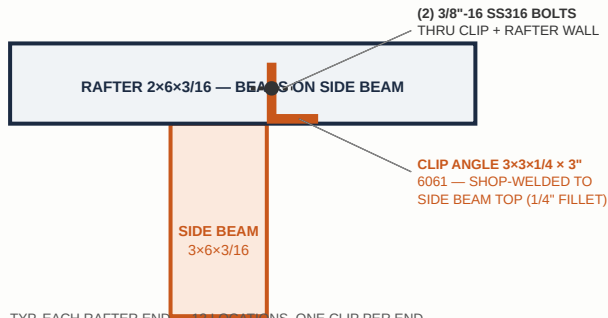

TYP. EACH RAFTER END — 12 LOCATIONS. ONE CLIP PER END, INSTALLED ON UPHILL FACE. RAFTER OVERHANG 1'-0" BEYOND BEAM.

Gravity by direct bearing; clip + bolts resist wind uplift and alignment.


DETAIL 2 · SIDE BEAM AT POST (PLAN SECTION)

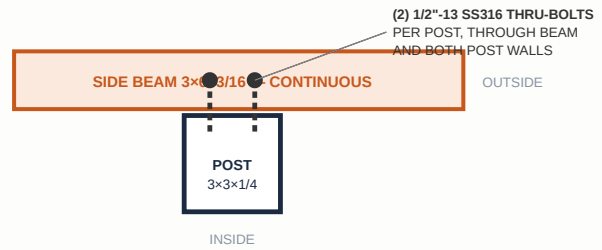

SIDE BEAM ON OUTSIDE FACE OF POSTS, TOP OF BEAM = TOP OF POST. 20'-0" ONE PIECE PER SIDE — NO SPLICES.

Typ. 6 locations. Bolt holes 1/16" oversize, deburred.


DETAIL 3 · DECK FASTENING (SECTION AT RAFTER)

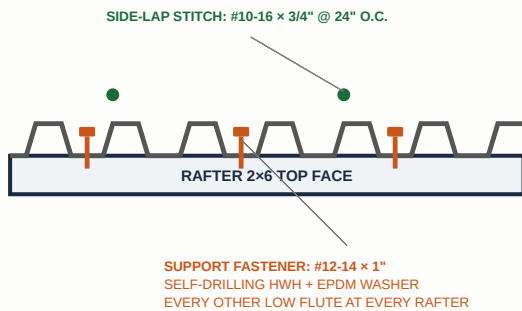

DECK: 1" PROFILE · GALVANIZED · 22'-0" FULL-LENGTH SHEETS (5 SPANS)

Perimeter/edge zone: every low flute. Cut edges cold-galv touch-up.

DETAIL 4 · FOOTING & BASE PLATE ANCHORAGE

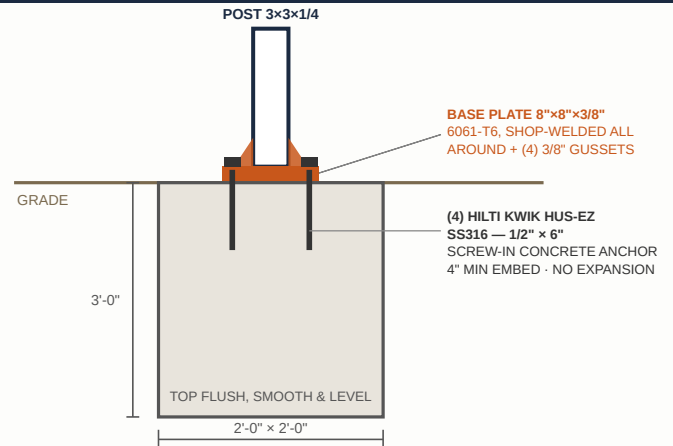

3,000 psi footing poured flush with grade; anchors installed after cure (min 7 days). Typ. 6.

BILL OF MATERIALS — CARPORT B

Mark	Member	Section	Alloy	Length	Qty
P1–P6	Column	3" × 3" × 1/4" sq. tube	6061-T6	13'-6" (field-trim)	6
R1–R6	Rafter	2" × 6" × 3/16" rect. tube	6061-T6	18'-0"	6
SB1–SB2	Side beam (continuous)	3" × 6" × 3/16" rect. tube	6061-T6	20'-0"	2
—	Clip angles (Detail 1)	3" × 3" × 1/4" angle × 3" long	6061-T6	—	12
—	Roof deck	1" profile, 20/22 ga, galvanized	Steel	22'-0" (3'-0" cov.)	6
—	Footing concrete, 3,000 psi	2'-0" × 2'-0" × 3'-0"	—	0.45 CY each	6

FASTENER SCHEDULE — CARPORT B

Location	Fastener	Qty / Spacing
----------	----------	---------------

Rafter to side beam (Detail 1)	3/8"-16 SS316 bolt, nylock nut, washers, thru clip angle	2 per rafter end · 24 total
Side beam to post (Detail 2)	1/2"-13 SS316 thru-bolt, nylock nut, fender washers	2 per post · 12 total
Deck to rafters (Detail 3)	#12-14 × 1" self-drilling HWH, bonded EPDM washer	Every other low flute at every rafter; every flute at edges
Deck side laps	#10-16 × 3/4" stitch screw	24" o.c. between rafters
Base plate anchors (Detail 4)	Hilti KWIK HUS-EZ SS316, 1/2" × 6" screw-in concrete anchor (no expansion), 4" min embed	4 per plate · 24 total

GENERAL NOTES

- All aluminum welding with 5356 filler by certified aluminum welder; 1/4" fillet welds unless noted.
- All bolts, nuts, washers and anchor rods stainless steel Type 316. Bolt holes 1/16" oversize, deburred.
- Galvanized deck on aluminum is a compatible (zinc) contact; deck cut edges touched up with cold-galvanizing compound.
- Footing tops poured flush with grade, smooth and level. Anchors installed into cured concrete (3,000 psi, min 7 days) with Hilti-specified bit and torque — screw-in anchors only, no expansion anchors. Isolation barrier (bituminous paint or membrane pad) between aluminum plate and concrete.
- 10'-0" clear entry height verified against owner's tractor (ROPS raised) before fabrication.
- Layout and final grades field-verified with owner before excavation. Structure designed as open (no walls) — do not enclose without review.