



WORK PROPOSAL

Proposal No.: JRG-2026-002

Structural & Ornamental Welding · Aluminum · Steel · Stainless · Exterior Renovation

Date: **July 21, 2026**

13796 SW 139 Ct, Miami, FL 33186 · (786) 804-9010 · [\[Email\]](#) · Lic. [\[License #\]](#)

Valid for: **30 days**

PREPARED FOR

Client: [\[Client Name\]](#)

Project Address: **18398 131st Trail N, Jupiter Farms, FL**

Phone / Email: [\[Client Contact\]](#)

PROJECT

Exterior wall re-cladding of two (2) storage sheds with James Hardie fiber-cement panel siding — replacing rotted wood walls with a rot-proof, termite-proof finish.

1. EXISTING CONDITIONS

Two (2) storage sheds on the property have exterior wood wall cladding with advanced rot deterioration. The wood siding has reached the end of its service life and allows moisture intrusion. The walls are 8'-0" high.

2. PROPOSED SOLUTION — FIBER-CEMENT PANEL SIDING

Re-clad the shed walls with **James Hardie HardiePanel HZ10 vertical siding, Sierra 8 wood-grain texture, 4'x8' sheets, 5/16" thick fiber-cement** — the HZ10 formulation is engineered specifically for hot, humid climates like South Florida:


- **Rot-proof and termite-proof** — cement-fiber composition; nothing to decay, nothing for insects to eat.
- **Weather resistant** — engineered for Florida sun, rain and wind; fire resistant.
- **Wood-grain Sierra 8 texture** with vertical grooves — the finished look of wood siding without its problems.
- Factory-primed finish, ready for paint. **Painting is NOT included in this proposal** — final paint color and painting by owner.

3. SCOPE OF WORK (EACH SHED)

1. **Demolition:** Remove **only the rotted exterior wall boards** — the existing 2x4 stud wall framing is in good condition and **remains in place** as the structure the new panels fasten to. Haul away and legally dispose of debris.
2. **Framing inspection:** With the walls open, inspect the studs and plates. Sound framing is re-used; any rot or termite damage found in the framing is reported to the owner and repaired only under an approved written change order before closing the walls.
3. **Moisture barrier:** Install weather-resistive wrap over the framing on all re-clad walls.
4. **Panel installation:** Install HardiePanel HZ10 Sierra 8 5/16" fiber-cement panels (James Hardie), fastened to the existing 2x4 studs with corrosion-resistant fasteners per James Hardie installation requirements, maintaining the required ground clearance; flashing at tops and corners; joints sealed with exterior sealant; trim at corners and openings.
5. **Exterior doors:** Furnish and install two (2) new exterior door slabs, 36"x80" — **fiberglass exterior-rated slab (Masonite / JELD-WEN or equal), built for outdoor humidity and heat:** no rust, no rot, no warping. **The existing door frames are in good condition and remain;** each new slab is fitted to its existing frame with new exterior-

grade hinges, lockset and deadbolt, weatherstripping and door sweep, cut edges sealed. Doors delivered factory-primed — final paint by owner. One per shed, field-verified.

- 6. **Prime & seal:** All panel cut edges and joints sealed; siding, trim and doors left in factory-primed finish, ready for the owner's painter. **Painting is not included.**
- 7. **Closeout:** Final cleanup and walkthrough with owner.

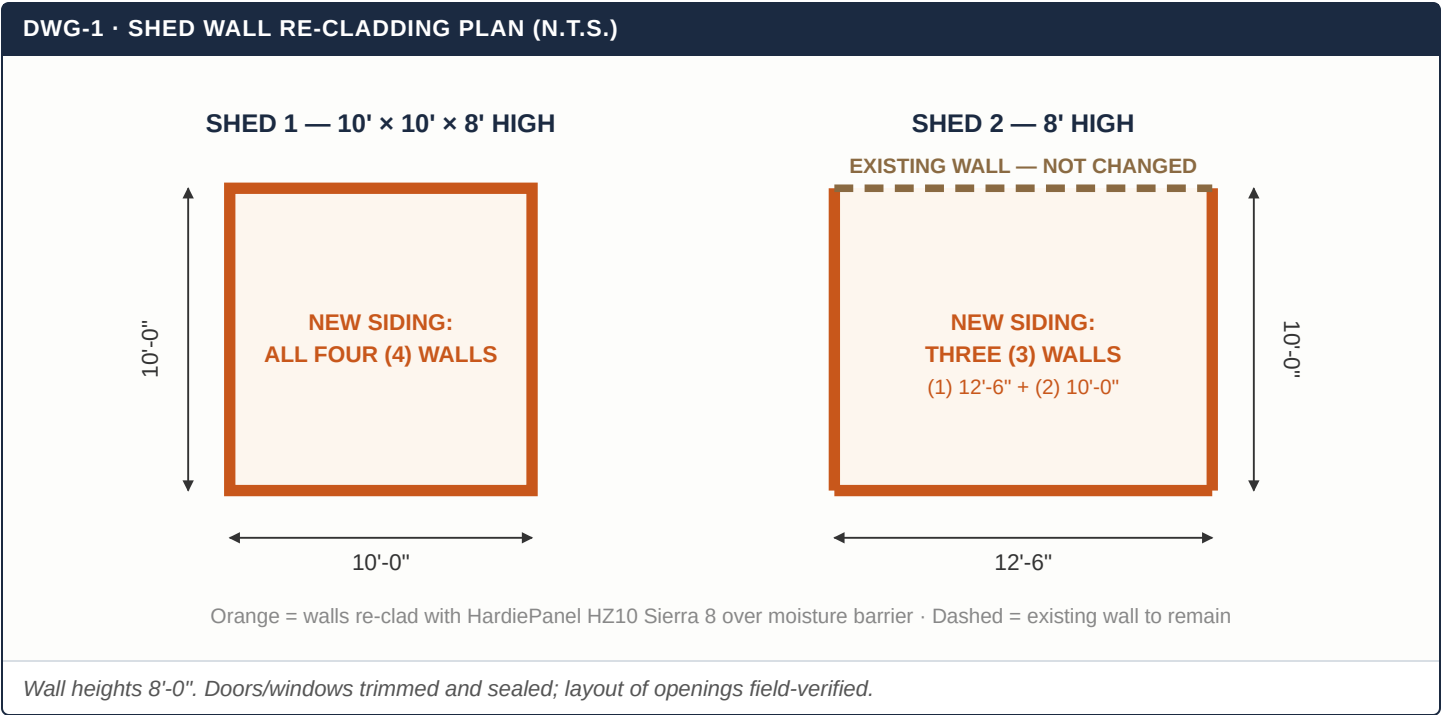

- **Warranty:** One (1) year on workmanship; siding material per James Hardie manufacturer warranty.
- **Exclusions: Painting (all siding, trim and doors are delivered factory-primed; final paint by owner);** structural framing repair (quoted by written change order if rot/termite damage is found at demolition); roofing; windows; electrical; interior finishes.
- Any additional work will be quoted and approved in writing before proceeding (change order).

JRG Welding Corp — Authorized Signature / Date

Client Acceptance — Signature / Date

JRG Welding Corp · Proposal JRG-2026-002 · Thank you for the opportunity to earn your business.