



## WORK PROPOSAL

Proposal No.: JRG-2026-008

Structural & Ornamental Welding · Aluminum · Steel · Stainless · Exterior Renovation

Date: **September 11, 2026**

13796 SW 139 Ct, Miami, FL 33186 · (786) 590-8986 · [\[Email\]](#) · Lic. [\[License #\]](#)

Valid for: **30 days**

### PREPARED FOR

Client: **Raul** [\[Last Name\]](#)

Project Address: **18398 131st Trail N, Jupiter Farms, FL**

Phone / Email: [\[Client Contact\]](#)

### PROJECT

Two (2) free-standing open carport structures in welded structural aluminum with galvanized steel roof deck:

**Carport A — 24' × 25'** (two vehicles) and **Carport B — 16' × 20'** (compact tractor).

## 1. DESIGN CONCEPT


Both structures are open-sided (no walls), fully welded **structural aluminum frames** — no rust, no rot, no painting ever required — covered with **galvanized steel roof deck** mechanically fastened to the frame. Columns are embedded in individual concrete footings; the embedded-column system resists wind without any diagonal bracing, keeping the structures completely open and clean. Roofs are single-slope (approx. 1 : 12) for positive drainage.

**Carport A** is designed per the owner's request with **no intermediate posts and no interior columns** — the full 24-foot width is spanned by deep aluminum girders (3"×12"), leaving both parking bays completely unobstructed.

## 2. CARPORT A — 24' × 25' (TWO VEHICLES)


- **Columns:** Eight (8) aluminum posts 4"×4"×1/4" 6061-T6 — four per side, aligned under each roof girder; **no posts at front, rear, or interior**. Clear height approx. 9'-0" at the high side, sloping to approx. 7'-0".
- **Roof girders:** Four (4) aluminum girders **3"×12"×0.188" 6005A-T61**, spanning the full 24' width (front, rear, and two intermediate at 8'-4" on center), through-bolted to the columns with stainless hardware.
- **Perimeter side beams:** 3"×6"×3/16" 6061-T6 continuous along both 25' sides, closing the perimeter frame and tying all columns together.
- **Roof deck:** Galvanized steel roof deck, **1-1/2" Type B, 18 gauge**, in continuous full-length sheets over three spans, fastened at every support with 1/4"-14 self-drilling fasteners and stitched at side laps.
- **Foundations:** Eight (8) concrete footings **2'-0" × 2'-0" × 3'-0" deep**; columns embedded 3'-0" with stainless steel cross-pin anchors; embedded aluminum protected with bituminous coating per code.

## DWG-1 · CARPORT A — FOUNDATION & ROOF FRAMING PLAN (24' × 25')

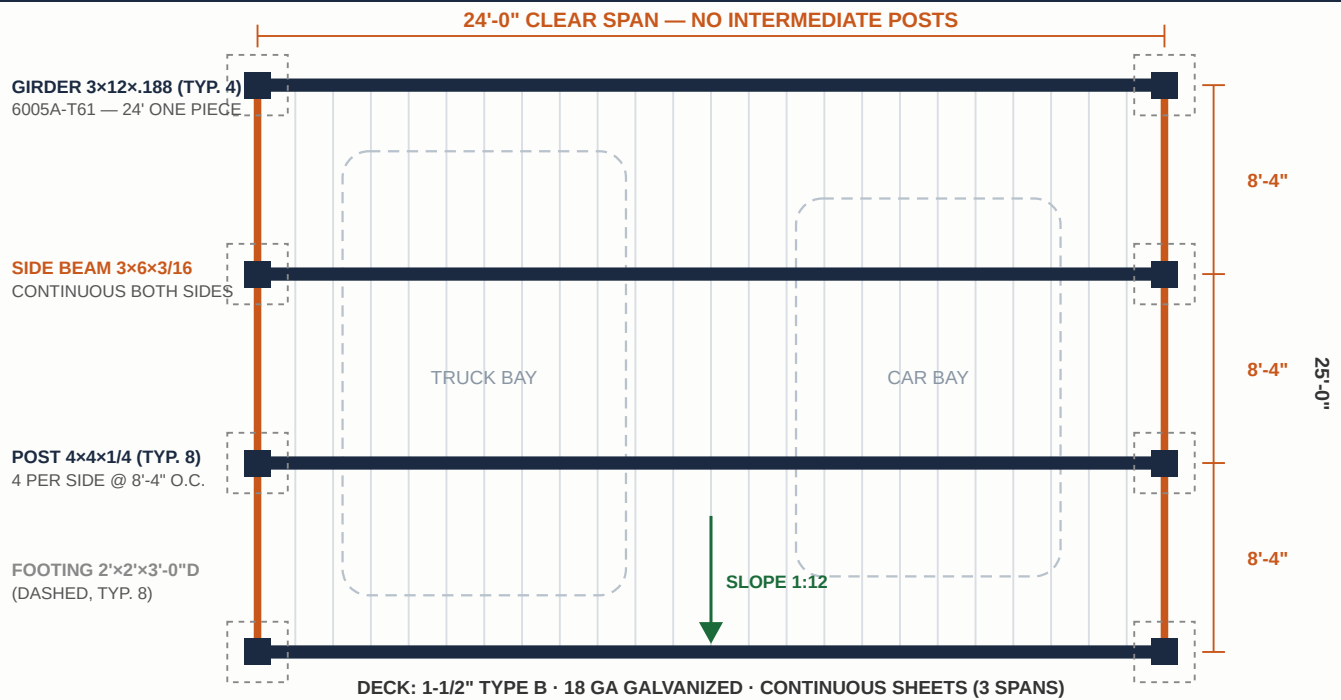

Both parking bays fully unobstructed — all columns on the two sides only. Deck ribs run in the slope direction for drainage.

## DWG-2 · CARPORT A — SIDE ELEVATION & FOOTING DETAIL

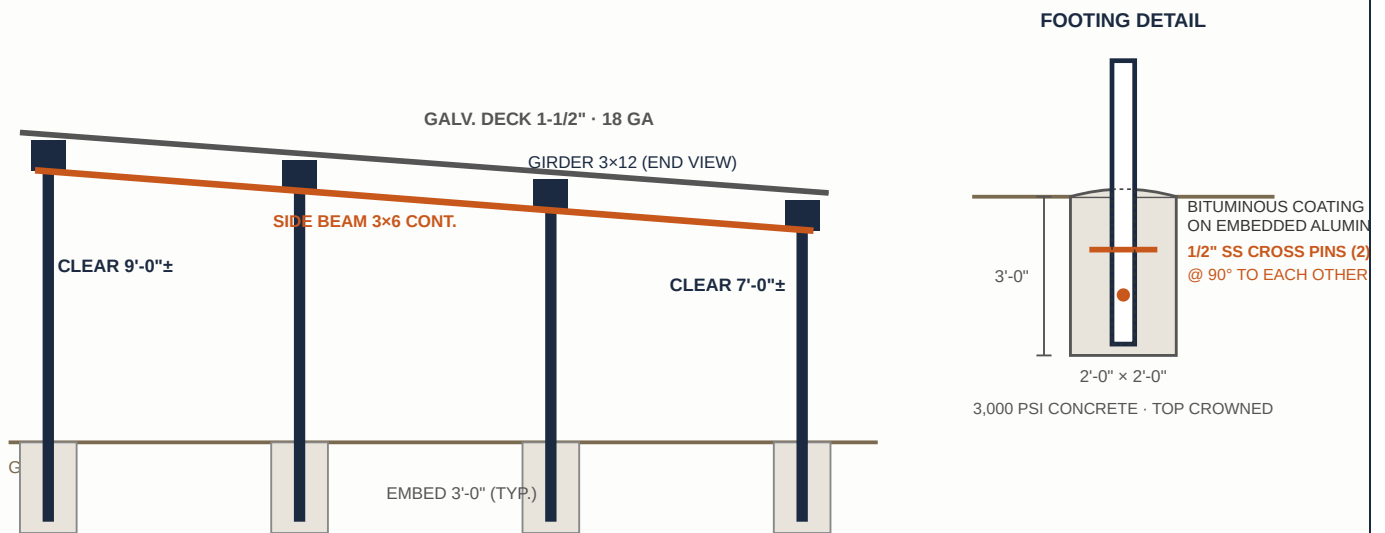


Single-slope roof approx. 1:12. Columns embedded 3'-0" in 2'×2'×3' concrete footings with stainless cross-pin anchors — wind resistance without diagonal bracing.

## 3. CARPORT B — 16' × 20' (TRACTOR)

- Columns:** Six (6) aluminum posts 3"×3"×1/4" 6061-T6, three per side at 10'-0" on center. **Clear height approx. 10'-0"** at the entry side (full ROPS clearance), sloping to approx. 8'-4".
- Side beams:** 3"×6"×3/16" 6061-T6 continuous along both 20' sides.

- **Rafters:** Six (6) aluminum rafters 2"x6"x3/16" spanning the 16' width at 4'-0" on center.
- **Roof deck:** Galvanized steel deck, **1" profile, 22 gauge**, full-length 20'-6" sheets, self-drilling fasteners at every support.
- **Foundations:** Six (6) concrete footings 2'-0" × 2'-0" × 3'-0" deep, same embedded-column detail as Carport A.

DWG-3 · CARPORT B — FRAMING PLAN & END ELEVATION (16' × 20')

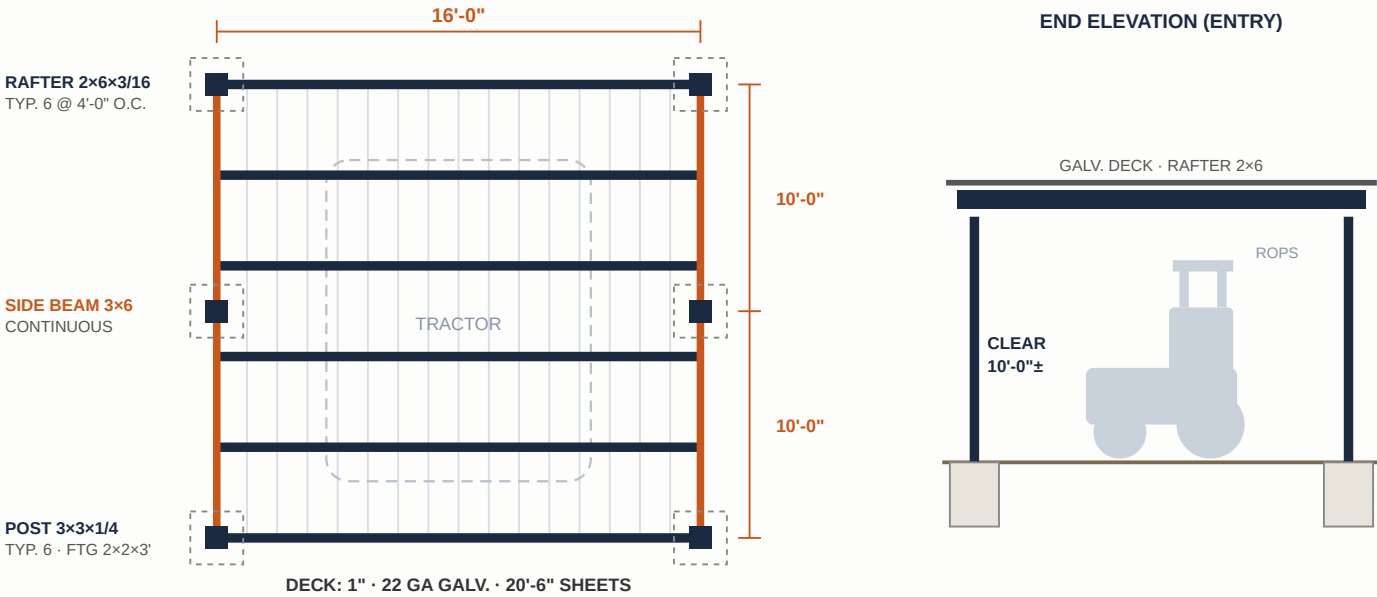

Full 10' clear entry height for tractor with roll bar (ROPS) raised. Slope 1:12 front to rear.

#### 4. SCOPE OF WORK (BOTH STRUCTURES)

1. **Layout & excavation:** Stake both structures, excavate fourteen (14) footings 2'x2'x3'-0" deep.
2. **Fabrication:** Cut and weld all aluminum framing (certified aluminum welding); girders and beams drilled for stainless through-bolt connections; embedded column sections coated with bituminous protection.
3. **Erection & concrete:** Set columns plumb and braced to exact grade, pour 3,000 psi concrete footings crowned for drainage; install girders, side beams and rafters after cure.
4. **Roofing:** Install galvanized deck with self-drilling fasteners at every support and side-lap stitching; edges finished clean — no sharp exposed corners.
5. **Closeout:** Site cleanup, haul-away of spoils and debris, final walkthrough with owner.

#### 5. PRICE

| Item                                                                                                                                                                                                                                                   | Amount       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| <b>Carport A — 24' × 25' two-vehicle open carport:</b> welded structural aluminum frame (8 posts 4x4, four 3x12 clear-span girders, perimeter beams), 18 ga galvanized Type B roof deck, eight 2'x2'x3' concrete footings — materials & labor, turnkey | \$ 17,500.00 |
| <b>Carport B — 16' × 20' tractor shelter:</b> welded structural aluminum frame (6 posts, side beams, 2x6 rafters), 22 ga galvanized roof deck, six 2'x2'x3' concrete footings, 10' clear entry — materials & labor, turnkey                            | \$ 9,500.00  |

TOTAL — BOTH STRUCTURES, MATERIALS & LABOR

\$ 27,000.00

## 6. TERMS & CONDITIONS

- **Payment:** [50%] deposit to schedule and order material; balance due upon completion and owner walkthrough.
- **Schedule:** Approx. two (2) to three (3) weeks, weather permitting.
- **Warranty:** One (1) year on workmanship; aluminum and galvanized deck are maintenance-free — no painting required, ever.
- **Exclusions:** Building permit fees and sealed engineering drawings (by owner, if required); electrical or lighting; concrete slab, paving or site grading under the structures; gutters and downspouts (available by change order); relocation of underground utilities if encountered.
- Final structure locations and orientations to be field-verified and confirmed with owner before excavation.
- Any additional work will be quoted and approved in writing before proceeding (change order).

---

JRG Welding Corp — Authorized Signature / Date

---

Client Acceptance — Signature / Date