



## WORK PROPOSAL

Proposal No.: JRG-2026-002

Structural & Ornamental Welding · Aluminum · Steel · Stainless · Exterior Renovation

Date: July 21, 2026

13796 SW 139 Ct, Miami, FL 33186 · (786) 804-9010 · [\[Email\]](#) · Lic. [\[License #\]](#)

Valid for: 30 days

### PREPARED FOR

Client: [\[Client Name\]](#)

Project Address: 18398 131st Trail N, Jupiter Farms, FL

Phone / Email: [\[Client Contact\]](#)

### PROJECT

Exterior wall re-cladding of two (2) storage sheds with James Hardie fiber-cement panel siding — replacing rotted wood walls with a rot-proof, termite-proof finish.

## 1. EXISTING CONDITIONS

Two (2) storage sheds on the property have exterior wood wall cladding with advanced rot deterioration. The wood siding has reached the end of its service life and allows moisture intrusion. The walls are 8'-0" high.


## 2. PROPOSED SOLUTION — FIBER-CEMENT PANEL SIDING

Re-clad the shed walls with **James Hardie HardiePanel HZ10 (Sierra 8 texture), 4'x8' fiber-cement panels** — the HZ10 formulation is engineered specifically for hot, humid climates like South Florida:

- **Rot-proof and termite-proof** — cement-fiber composition; nothing to decay, nothing for insects to eat.
- **Weather resistant** — engineered for Florida sun, rain and wind; fire resistant.
- **Wood-grain Sierra 8 texture** with vertical grooves — the finished look of wood siding without its problems.
- Factory-primed, finished with exterior-grade paint in the owner's choice of color.

## 3. SCOPE OF WORK (EACH SHED)

1. **Demolition:** Remove the rotted wood wall cladding; haul away and legally dispose of debris.
2. **Framing inspection:** With the walls open, inspect the studs and plates. Sound framing is re-used; any rot or termite damage found in the framing is reported to the owner and repaired only under an approved written change order before closing the walls.
3. **Moisture barrier:** Install weather-resistive wrap over the framing on all re-clad walls.
4. **Panel installation:** Install HardiePanel HZ10 Sierra 8 panels with corrosion-resistant fasteners per James Hardie installation requirements, maintaining the required ground clearance; flashing at tops and corners; joints sealed with exterior sealant; trim at corners and openings.
5. **Paint:** Finish all new siding and trim with exterior-grade paint, color selected by owner.
6. **Closeout:** Final cleanup and walkthrough with owner.

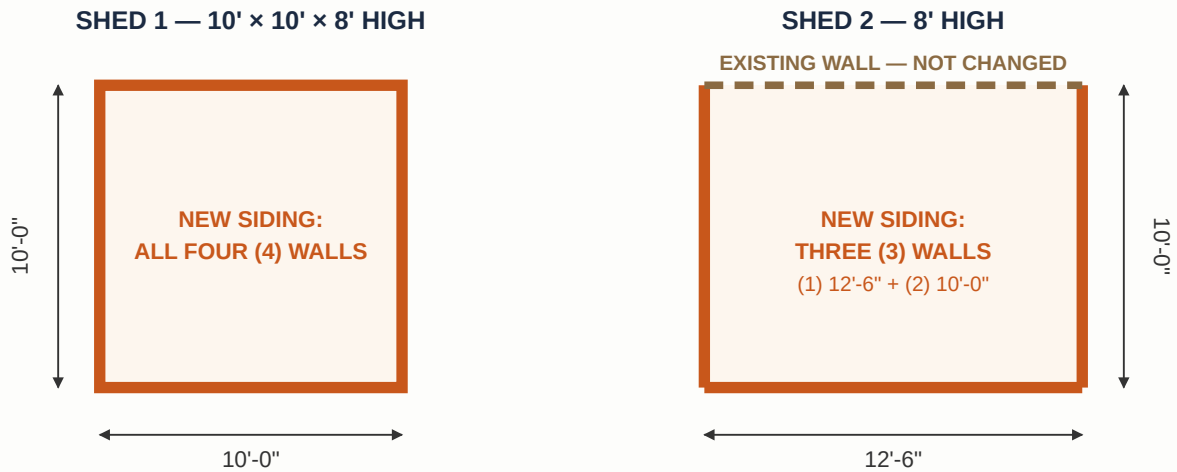

Orange = walls re-clad with HardiePanel HZ10 Sierra 8 over moisture barrier · Dashed = existing wall to remain

Wall heights 8'-0". Doors/windows trimmed and sealed; layout of openings field-verified.

#### 4. PRICE

| Item                                                                                                                                                                    | Amount             |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| <b>Shed 1 — 10' × 10' × 8':</b> complete re-cladding of all four (4) walls — demolition, moisture barrier, HardiePanel HZ10 Sierra 8, flashing, trim, sealant and paint | \$ 5,000.00        |
| <b>Shed 2 — 8' high, three (3) walls</b> (one 12'-6" + two 10'-0"; remaining wall untouched): same complete system                                                      | \$ 4,000.00        |
| <b>TOTAL — BOTH SHEDS, MATERIALS &amp; LABOR</b>                                                                                                                        | <b>\$ 9,000.00</b> |

#### 5. TERMS & CONDITIONS

- **Payment:** [50%] deposit to schedule and order material; balance due upon completion and owner walkthrough.
- **Schedule:** Approx. [5–7] working days for both sheds, weather permitting; may be scheduled together with the ongoing structural contract to share mobilization.
- **Warranty:** One (1) year on workmanship; siding material per James Hardie manufacturer warranty.
- **Exclusions:** Structural framing repair (quoted by written change order if rot/termite damage is found at demolition), roofing, doors and windows, electrical, interior finishes.
- Any additional work will be quoted and approved in writing before proceeding (change order).

JRG Welding Corp — Authorized Signature / Date

Client Acceptance — Signature / Date