



## WORK PROPOSAL

Proposal No.: JRG-2026-008

Structural & Ornamental Welding · Aluminum · Steel · Stainless · Exterior Renovation

Date: **September 11, 2026**

Valid for: **30 days**

13796 SW 139 Ct, Miami, FL 33186 · (786) 590-8986 · [\[Email\]](#) · Lic. [\[License #\]](#)

### PREPARED FOR

Client: **Raul** [\[Last Name\]](#)

Project Address: **18398 131st Trail N, Jupiter Farms, FL**

Phone / Email: [\[Client Contact\]](#)

### PROJECT

Two (2) free-standing open carport structures in welded structural aluminum with galvanized steel roof deck:

**Carport A — 24' × 25'** (two vehicles) and **Carport B — 16' × 20'** (compact tractor).

## 1. DESIGN CONCEPT


Both structures are open-sided (no walls), fully welded **structural aluminum frames** — no rust, no rot, no painting ever required — covered with **galvanized steel roof deck** mechanically fastened to the frame. Each column is shop-welded to a heavy gusseted base plate and anchored to its own concrete footing with **Hilti stainless screw-in concrete anchors** (threaded directly into the concrete — no expansion anchors), keeping the structures completely open and clean with no diagonal bracing. Roofs are single-slope (approx. 1 : 12) for positive drainage.

**Carport A** is designed per the owner's request with **no intermediate posts and no interior columns** — the full 24-foot width is spanned by deep aluminum girders (3"×12"), leaving both parking bays completely unobstructed.

## 2. CARPORT A — 24' × 25' (TWO VEHICLES)


- **Columns:** Eight (8) aluminum posts 4"×4"×1/4" 6061-T6 — four per side, aligned under each roof girder; **no posts at front, rear, or interior**. Clear height approx. 9'-0" at the high side, sloping to approx. 7'-0".
- **Roof girders:** Four (4) aluminum girders **3"×12"×0.188" 6005A-T61**, **spanning the full 24' width** (front, rear, and two intermediate at 8'-4" on center), through-bolted to the columns with stainless hardware.
- **Perimeter side beams:** 3"×6"×3/16" 6061-T6 continuous along both 25' sides, closing the perimeter frame and tying all columns together.
- **Roof deck:** Galvanized steel roof deck, **1-1/2" Type B, 18 gauge**, in continuous full-length sheets over three spans with a 1'-0" roof overhang on all sides, fastened at every support with 1/4"-14 self-drilling fasteners and stitched at side laps.
- **Foundations:** Eight (8) concrete footings **2'-0" × 2'-0" × 3'-0" deep**, poured flush with grade; each column shop-welded to a **10"×10"×1/2" gusseted base plate** anchored with **(4) Hilti KWIK HUS-EZ stainless screw-in concrete anchors** (no expansion anchors).

## DWG-1 · CARPORT A — FOUNDATION & ROOF FRAMING PLAN (24' × 25')

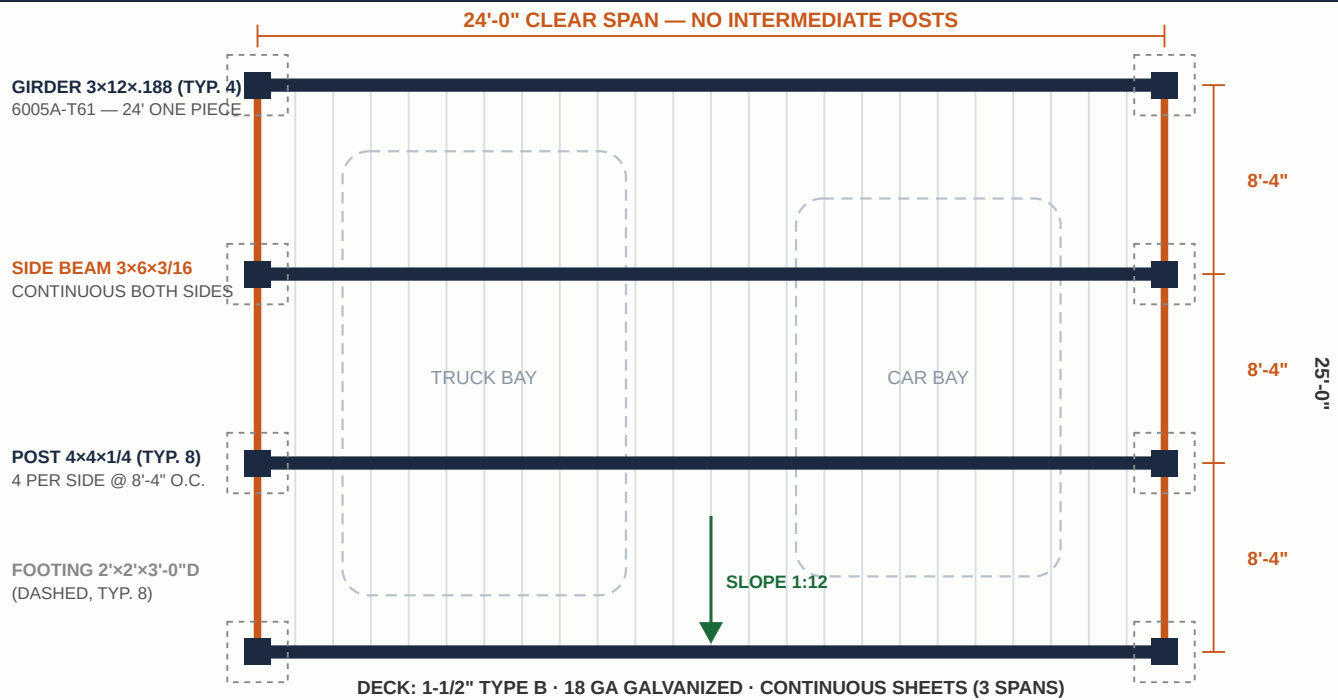


Both parking bays fully unobstructed — all columns on the two sides only. Deck ribs run in the slope direction for drainage.

## DWG-2 · CARPORT A — SIDE ELEVATION & FOOTING DETAIL

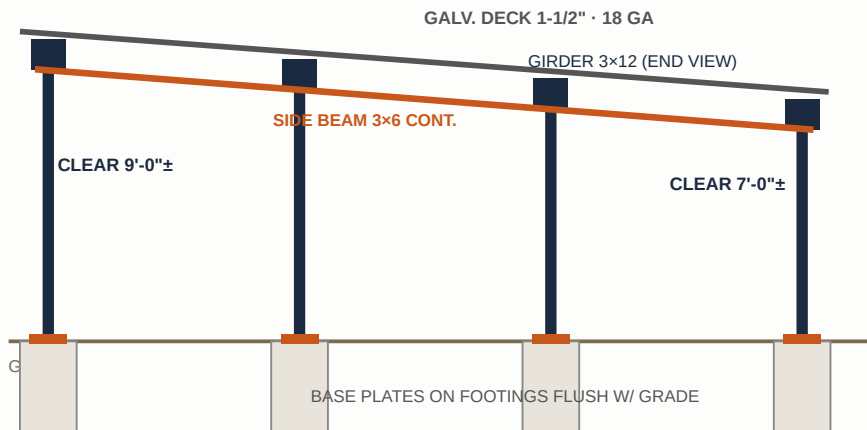

### BASE PLATE DETAIL

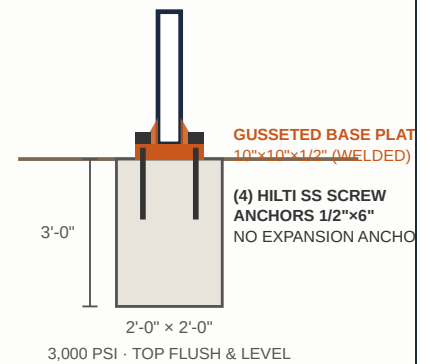


Single-slope roof approx. 1:12. Columns embedded 3'-0" in 2'×2'×3' concrete footings with stainless cross-pin anchors — wind resistance without diagonal bracing.

## 3. CARPORT B — 16' × 20' (TRACTOR)

- Columns:** Six (6) aluminum posts 3"×3"×1/4" 6061-T6, three per side at 10'-0" on center. **Clear height approx. 10'-0"** at the entry side (full ROPS clearance), sloping to approx. 8'-4".
- Side beams:** 3"×6"×3/16" 6061-T6 continuous along both 20' sides.

- **Rafters:** Six (6) aluminum rafters 2"x6"x3/16" spanning the 16' width at 4'-0" on center.
- **Roof deck:** Galvanized steel deck, **1" profile, 22 gauge**, full-length sheets with a 1'-0" roof overhang on all sides, self-drilling fasteners at every support.
- **Foundations:** Six (6) concrete footings 2'-0" x 2'-0" x 3'-0" deep, poured flush with grade; columns on **8"x8"x3/8" gusseted base plates** with (4) Hilti stainless screw-in anchors each — same system as Carport A.

#### DWG-3 · CARPORT B — FRAMING PLAN & END ELEVATION (16' x 20')

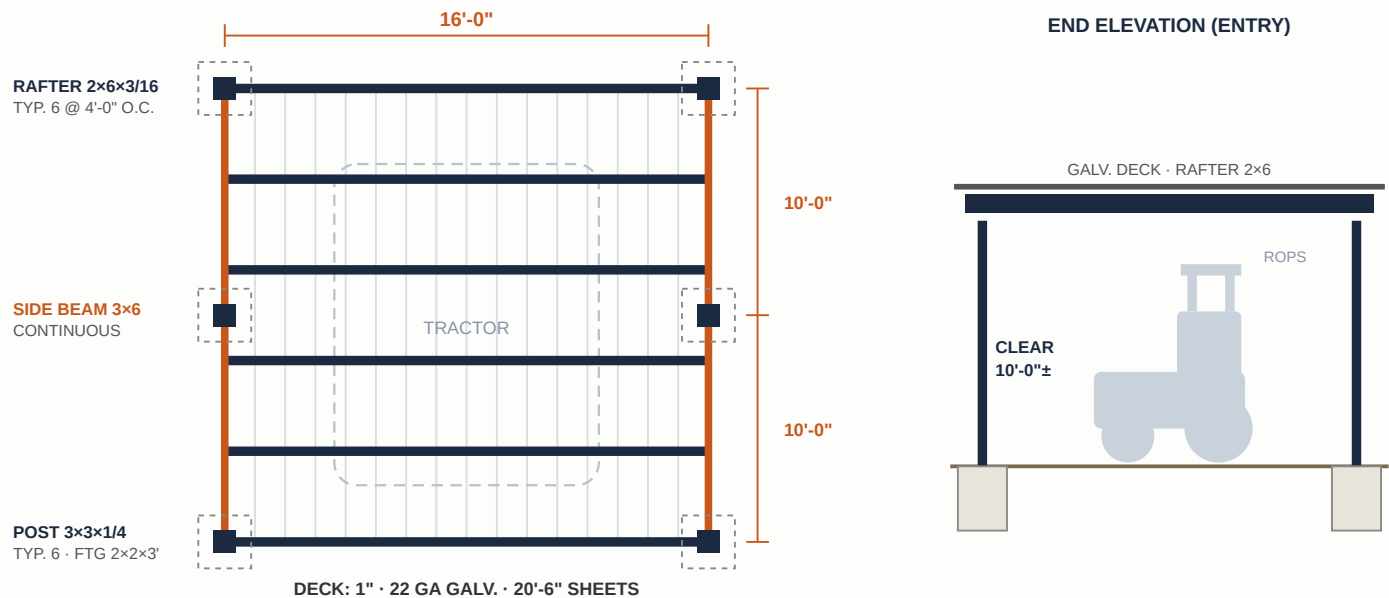

Full 10' clear entry height for tractor with roll bar (ROPS) raised. Slope 1:12 front to rear.

### 4. OPTIONAL — CUSTOM ROLL-UP SIDE CURTAINS (FULL ENCLOSURE)

As an optional add-on, either structure can be fitted with a **custom-fabricated roll-up curtain system** to close any or all four sides — and open them again in seconds:

- **Curtains made to measure** for each opening in **heavy-duty 18 oz vinyl** (solid color to match, or with a clear-vinyl window band), hemmed and reinforced.
- **Hand-crank roll-up operation:** each curtain rolls up onto an aluminum tube at the roof edge with a geared crank — up and down in under a minute, no ladders. Stainless guide cables keep the curtain straight; weighted bottom bar keeps it taut.
- **Fully open when rolled up:** the rolled curtain tucks under the roof overhang — the carport stays 100% open and clean.
- **Motorized upgrade available:** tubular electric motors with remote control in place of the cranks.
- **Important:** curtains are a sun / rain / dust screen, not a structural wall. They must be **rolled up and secured during tropical storm or hurricane warnings** and any high-wind event.

### 5. SCOPE OF WORK (BOTH STRUCTURES)

1. **Layout & excavation:** Stake both structures, excavate fourteen (14) footings 2'x2'x3'-0" deep.
2. **Fabrication:** Cut and weld all aluminum framing (certified aluminum welding); girders and beams drilled for stainless through-bolt connections; columns shop-welded to gusseted base plates.

- 3. **Erection & concrete:** Pour 3,000 psi concrete footings flush with grade, tops smooth and level; after cure, set columns plumb on their base plates and anchor with Hilti stainless screw-in concrete anchors; install girders, side beams and rafters.
- 4. **Roofing:** Install galvanized deck with self-drilling fasteners at every support and side-lap stitching; edges finished clean — no sharp exposed corners.
- 5. **Closeout:** Site cleanup, haul-away of spoils and debris, final walkthrough with owner.

6. PRICE

| Item                                                                                                                                                                                                                                                   | Amount              |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| <b>Carport A — 24' × 25' two-vehicle open carport:</b> welded structural aluminum frame (8 posts 4×4, four 3×12 clear-span girders, perimeter beams), 18 ga galvanized Type B roof deck, eight 2'×2'×3' concrete footings — materials & labor, turnkey | \$ 17,500.00        |
| <b>Carport B — 16' × 20' tractor shelter:</b> welded structural aluminum frame (6 posts, side beams, 2×6 rafters), 22 ga galvanized roof deck, six 2'×2'×3' concrete footings, 10' clear entry — materials & labor, turnkey                            | \$ 9,500.00         |
| <b>TOTAL — BOTH STRUCTURES, MATERIALS &amp; LABOR</b>                                                                                                                                                                                                  | <b>\$ 27,000.00</b> |

Optional Add-Ons — Roll-Up Side Curtains (selected at acceptance)

| Option                                                                                                                                                                                                                       | Amount        |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| <b>OPT-1 · Carport A full-perimeter roll-up curtains:</b> four (4) custom-fabricated 18 oz vinyl roll-up curtains (front, rear, both sides — approx. 735 SF), hand-crank operation, stainless guides and hardware, installed | \$ 8,900.00   |
| <b>OPT-2 · Carport B full-perimeter roll-up curtains:</b> four (4) custom curtains (approx. 630 SF), same system, installed                                                                                                  | \$ 7,400.00   |
| <b>OPT-3 · Motorized upgrade</b> (per structure): four (4) tubular electric motors with remote control in place of hand cranks — requires power at the structure (electrical by owner)                                       | + \$ 1,900.00 |
| Individual sides can also be quoted separately (e.g., west side only for afternoon sun). Curtain color / clear-band selection at ordering.                                                                                   |               |

7. TERMS & CONDITIONS

- **Payment: 50% deposit** (\$13,500.00) to schedule and order material; balance due upon completion and owner walkthrough.
- **Schedule:** Approx. two (2) to three (3) weeks, weather permitting.
- **Warranty:** One (1) year on workmanship; aluminum and galvanized deck are maintenance-free — no painting required, ever.
- **Exclusions:** Building permit fees and sealed engineering drawings (by owner, if required); electrical or lighting; concrete slab, paving or site grading under the structures; gutters and downspouts (available by change order); relocation of underground utilities if encountered.
- Final structure locations and orientations to be field-verified and confirmed with owner before excavation.

- **Roll-up curtains (if selected):** weather screen only, not a wind-rated enclosure — must be rolled up and secured during storm warnings; vinyl per manufacturer warranty.
- Any additional work will be quoted and approved in writing before proceeding (change order).

---

JRG Welding Corp — Authorized Signature / Date

---

Client Acceptance — Signature / Date

---


JRG Welding Corp · Proposal JRG-2026-008 · Thank you for the opportunity to earn your business.

DESIGN VIEW · CARPORT A

# Two-Vehicle Aluminum Carport



Prepared for **Raul** · 18398 131st Trail N, Jupiter Farms, FL  
Ref. Proposal JRG-2026-008 · September 2026

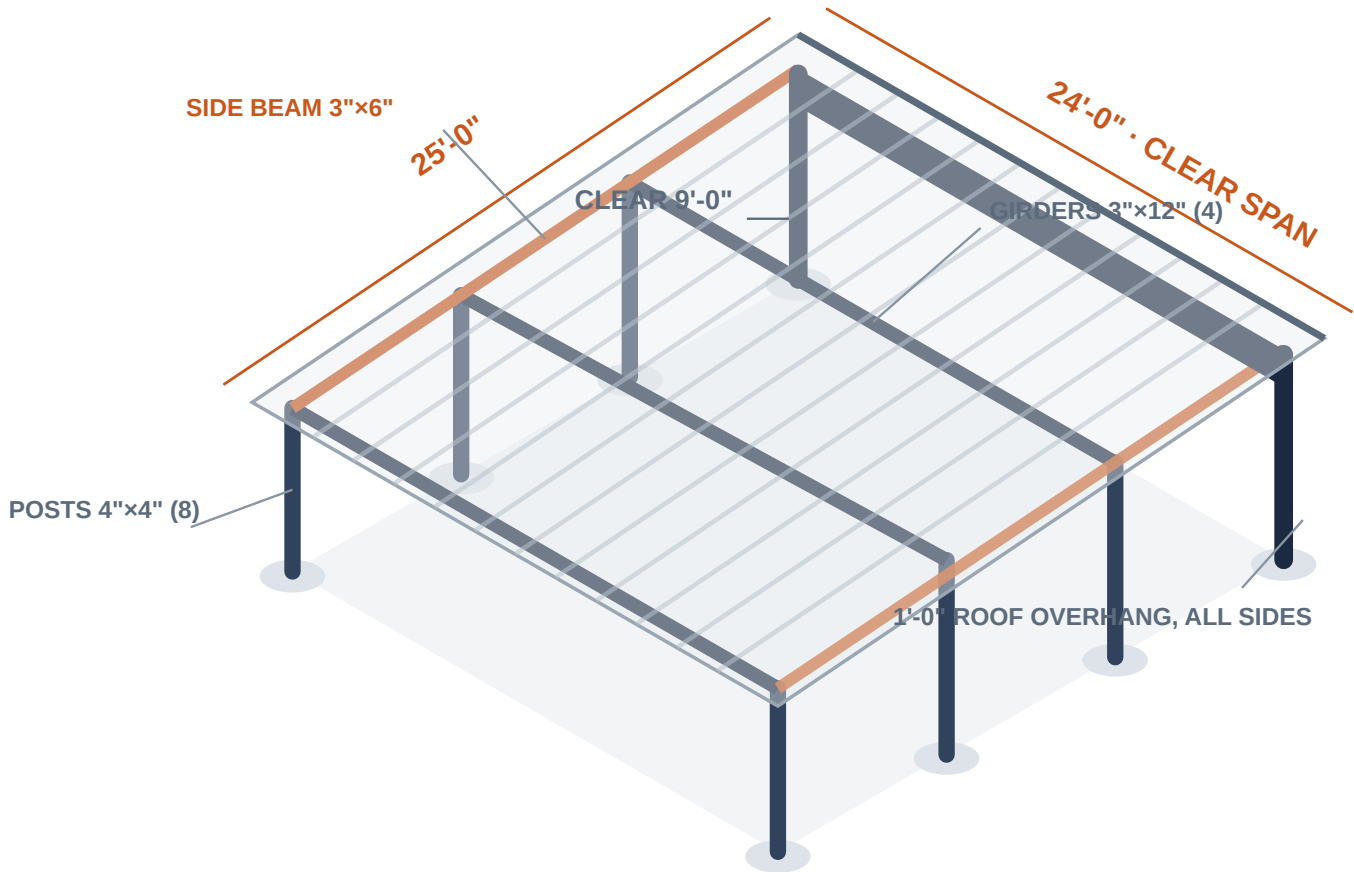


|                                                                                                              |                                                                                                            |                                                                                                                     |                                                                                                                                       |
|--------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| <b>24' × 25'</b><br>FOOTPRINT                                                                                | <b>2 Bays</b><br>FULLY OPEN — NO CENTER POSTS                                                              | <b>9'-0"</b><br>CLEAR HEIGHT AT ENTRY                                                                               | <b>1 : 12</b><br>ROOF SLOPE · POSITIVE DRAINAGE                                                                                       |
| <b>Welded Aluminum Structure</b><br>Never rusts, never rots, never needs paint — clean mill finish for life. | <b>Clear-Span Design</b><br>Deep 12" aluminum girders span the full 24 ft — nothing between your vehicles. | <b>Galvanized Steel Roof</b><br>Heavy-gauge structural roof deck, mechanically fastened, built for Florida weather. | <b>Bolted Base Plates</b><br>Each column on a welded base plate, anchored to its concrete footing with Hilti stainless screw anchors. |

DESIGN VIEW · CARPORT B


# Aluminum Tractor Shelter



Prepared for **Raul** · 18398 131st Trail N, Jupiter Farms, FL  
Ref. Proposal JRG-2026-008 · September 2026

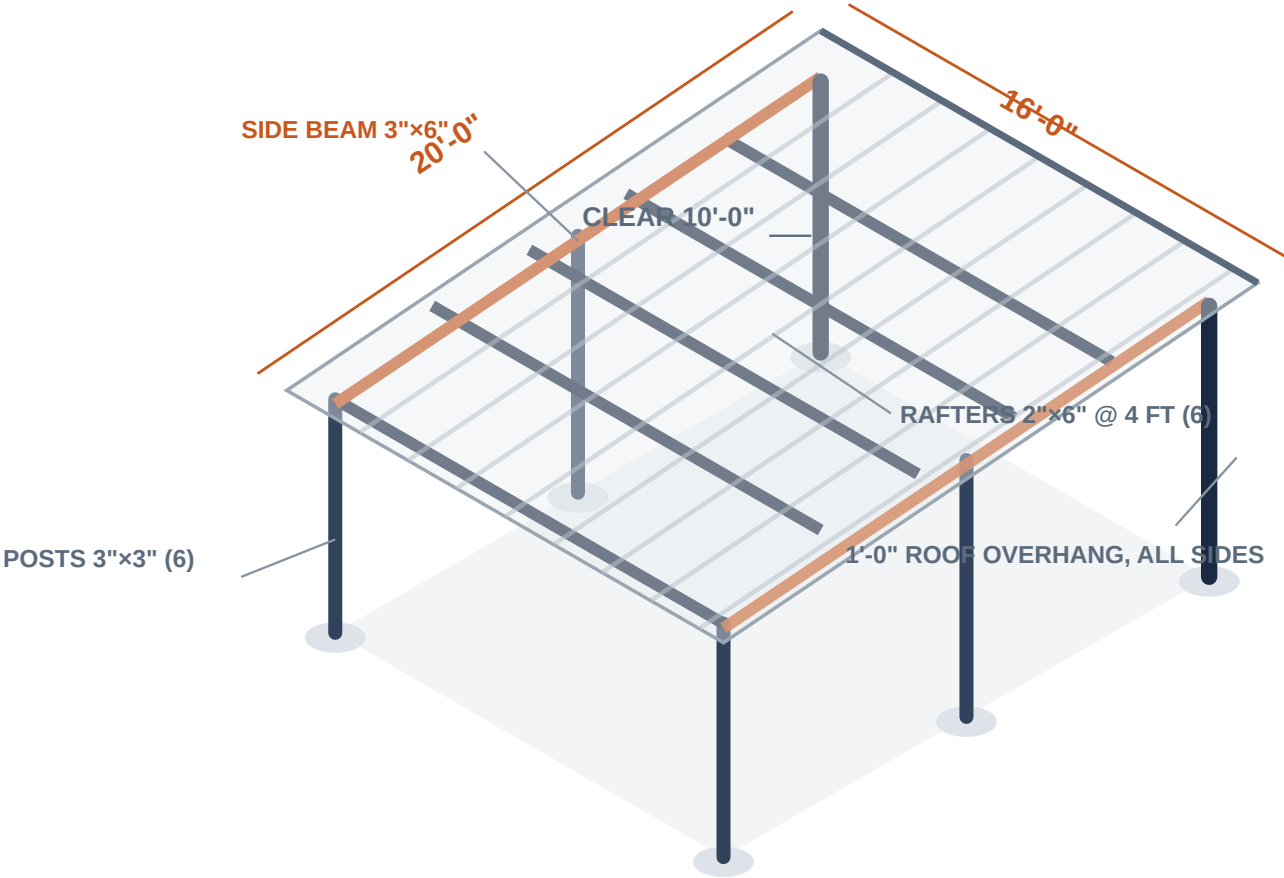

|                                                                                                                    |                                                                                                                   |                                                                                                           |                                                                                                                                                |
|--------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>16' × 20'</b><br>FOOTPRINT                                                                                      | <b>10'-0"</b><br>CLEAR ENTRY — ROLL BAR<br>UP                                                                     | <b>6 Posts</b><br>ALL ON THE SIDES · OPEN<br>ENTRY                                                        | <b>1 : 12</b><br>ROOF SLOPE · POSITIVE<br>DRAINAGE                                                                                             |
| <b>Welded Aluminum Structure</b><br>Never rusts, never rots,<br>never needs paint — clean<br>mill finish for life. | <b>Full Tractor Clearance</b><br>10 ft clear at the entry —<br>drive in with the roll bar<br>(ROPS) fully raised. | <b>Galvanized Steel Roof</b><br>Structural roof deck in full-<br>length sheets, mechanically<br>fastened. | <b>Bolted Base Plates</b><br>Each column on a welded<br>base plate, anchored to its<br>concrete footing with Hilti<br>stainless screw anchors. |



Sheet: **DWG-A · Carport A**  
Ref.: Proposal **JRG-2026-008**  
Date: **September 11, 2026**

**A-2 · SIDE ELEVATION**

The diagram illustrates the side elevation of a bridge structure. It features four vertical posts (P1, P2, P3, P4) supporting a deck. The deck is labeled "DECK 1-1/2\" TYPE B 18 GA". The girders are labeled "G3 3x12 (END)". The posts are labeled "SB 3x6 CONT.". The deck is sloped, with a note "Single slope 1:12 front to rear. Girders level side-to-side; deck ribs drain front to rear." The posts are labeled "CLEAR 9'-0\"±" and "CLEAR 7'-0\"±". The base plates on footings are flush with grade. The diagram includes a "GRA" line and a "4" in a circle. The text "BASE PLATES ON FOOTINGS FLUSH W/ GRADE — DET" is visible.


**POST HEIGHTS (A.F.G.)**

- P1/P5 (front): 9'-0"
- P2/P6: 8'-4"
- P3/P7: 7'-8"
- P4/P8 (rear): 7'-0"

CUT POST STOCK 12'-6"  
FIELD-TRIM TO GRADE


Single slope 1:12 front to rear. Girders level side-to-side; deck ribs drain front to rear.

### DETAIL 1 · GIRDER-TO-POST CONNECTION

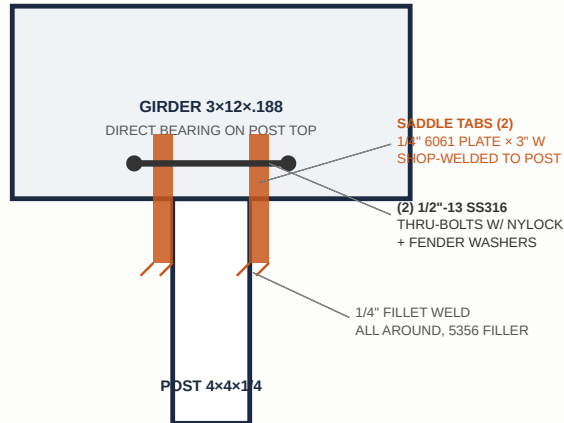

Girder bears on post top (gravity); saddle tabs + thru-bolts resist wind uplift. Typ. 8 locations.


### DETAIL 2 · SIDE BEAM AT POST (PLAN SECTION)

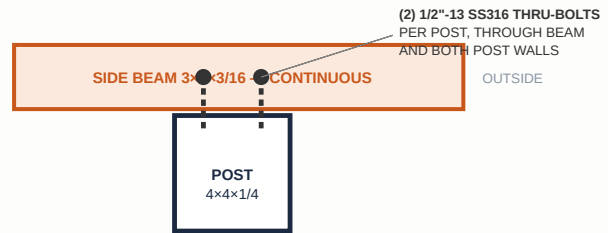

SIDE BEAM RUNS ON OUTSIDE FACE OF ALL 4 POSTS, TOP FLUSH WITH GIRDER BEARING — TIES COLUMN LINE, 25'-0" ONE PIECE (SPlice OVER POST PERMITTED, INTERNAL SLEEVE 12" + (4) 3/8" SS BOLTS)

Typ. 8 locations (4 per side). All bolt holes drilled 1/16" oversize, deburred.


### DETAIL 3 · DECK FASTENING (SECTION AT GIRDER)

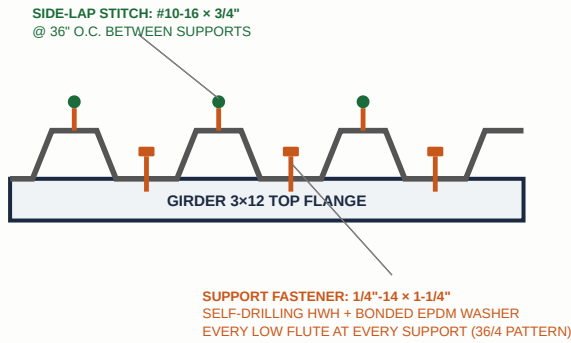

DECK: 1-1/2" TYPE B · 18 GA · G90 GALVANIZED · SHEETS CONTINUOUS OVER 3 SPANS

Perimeter zone: fastener in EVERY flute. Field: every flute at supports per HVHZ practice.

### DETAIL 4 · FOOTING & BASE PLATE ANCHORAGE

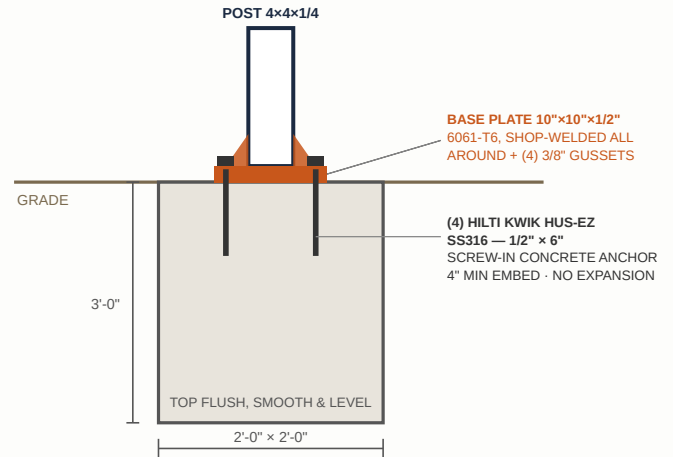

3,000 psi footing poured flush with grade; anchors installed after cure (min 7 days). Typ. 8.

## BILL OF MATERIALS — CARPORT A

| Mark    | Member                      | Section                         | Alloy     | Length              | Qty |
|---------|-----------------------------|---------------------------------|-----------|---------------------|-----|
| P1–P8   | Column                      | 4" x 4" x 1/4" sq. tube         | 6061-T6   | 12'-6" (field-trim) | 8   |
| G1–G4   | Roof girder (clear span)    | 3" x 12" x 0.188" rect. tube    | 6005A-T61 | 24'-0"              | 4   |
| SB1–SB2 | Side beam (continuous)      | 3" x 6" x 3/16" rect. tube      | 6061-T6   | 25'-0"              | 2   |
| —       | Saddle tabs (Detail 1)      | 1/4" plate, 3" x 6"             | 6061-T6   | —                   | 16  |
| —       | Roof deck                   | 1-1/2" Type B, 18 ga, G90 galv. | Steel     | 27'-0" (3'-0" cov.) | 9   |
| —       | Footing concrete, 3,000 psi | 2'-0" x 2'-0" x 3'-0"           | —         | 0.45 CY each        | 8   |

## FASTENER SCHEDULE — CARPORT A

| Location | Fastener | Qty / Spacing |
|----------|----------|---------------|
|----------|----------|---------------|


|                               |                                                                                          |                                  |
|-------------------------------|------------------------------------------------------------------------------------------|----------------------------------|
| Girder to post (Detail 1)     | 1/2"-13 × 5-1/2" SS316 hex bolt, nylock nut, fender washers                              | 2 per post · 16 total            |
| Side beam to post (Detail 2)  | 1/2"-13 SS316 thru-bolt, nylock nut, fender washers                                      | 2 per post · 16 total            |
| Deck to girders (Detail 3)    | 1/4"-14 × 1-1/4" self-drilling HWH, bonded EPDM washer                                   | Every low flute at every support |
| Deck side laps                | #10-16 × 3/4" stitch screw                                                               | 36" o.c. between supports        |
| Base plate anchors (Detail 4) | Hilti KWIK HUS-EZ SS316, 1/2" × 6" screw-in concrete anchor (no expansion), 4" min embed | 4 per plate · 32 total           |

## GENERAL NOTES

- All aluminum welding with 5356 filler by certified aluminum welder; 1/4" fillet welds unless noted.
- All bolts, nuts, washers and anchor rods stainless steel Type 316. Bolt holes 1/16" oversize, deburred.
- Galvanized deck bearing directly on aluminum is a compatible (zinc) contact; all deck cut edges touched up with cold-galvanizing compound.
- Footing tops poured flush with grade, smooth and level. Anchors installed into cured concrete (3,000 psi, min 7 days) with Hilti-specified bit and torque — screw-in anchors only, no expansion anchors. Isolation barrier (bituminous paint or membrane pad) between aluminum plate and concrete.
- Layout, post locations and final grades field-verified with owner before excavation. Roof deck overhangs the frame 1'-0" on all four sides. Deck sheet lengths confirmed against as-built frame before ordering.
- Structure designed as open (no walls). Do not enclose sides without review — wind loads change.


|                                              |                                                    |                |                 |
|----------------------------------------------|----------------------------------------------------|----------------|-----------------|
| PROJECT<br>Tractor Shelter — 16'-0" x 20'-0" | LOCATION<br>18398 131st Trail N, Jupiter Farms, FL | CLIENT<br>Raul | SCALE<br>N.T.S. |
|----------------------------------------------|----------------------------------------------------|----------------|-----------------|

B-1 · FOUNDATION & ROOF FRAMING PLAN

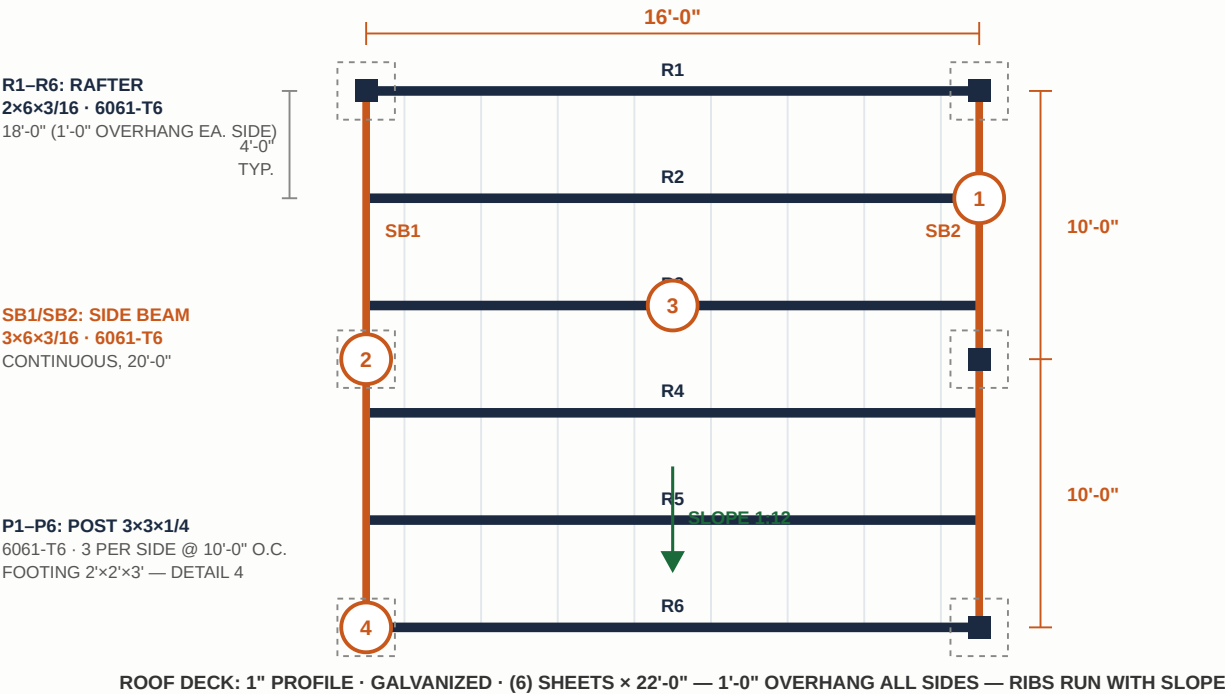


Entry at front (high) end — 10'-0" clear for tractor ROPS. Circled numbers reference details below.

B-2 · SIDE ELEVATION

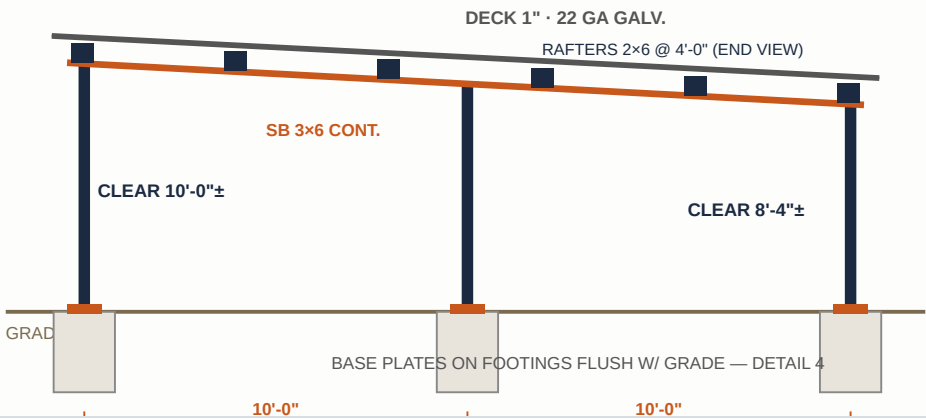

Single slope 1:12 front to rear. Post heights above grade: front 10'-0", middle 9'-2", rear 8'-4" (cut from 13'-6" stock, field-trim).


DETAIL 1 · RAFTER-TO-SIDE BEAM CONNECTION

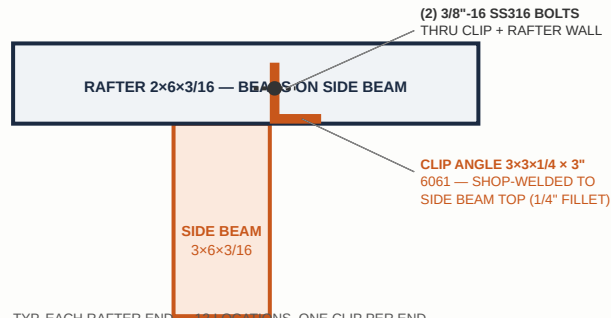

TYP. EACH RAFTER END — 12 LOCATIONS. ONE CLIP PER END, INSTALLED ON UPHILL FACE. RAFTER OVERHANG 1'-0" BEYOND BEAM.

Gravity by direct bearing; clip + bolts resist wind uplift and alignment.


DETAIL 2 · SIDE BEAM AT POST (PLAN SECTION)

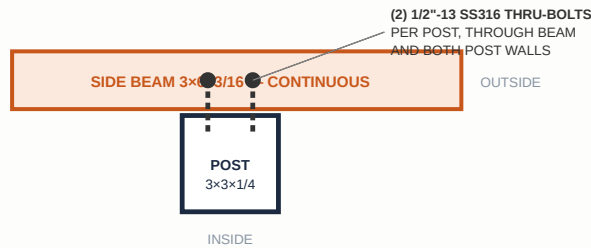

SIDE BEAM ON OUTSIDE FACE OF POSTS, TOP OF BEAM = TOP OF POST. 20'-0" ONE PIECE PER SIDE — NO SPLICES.

Typ. 6 locations. Bolt holes 1/16" oversize, deburred.


DETAIL 3 · DECK FASTENING (SECTION AT RAFTER)

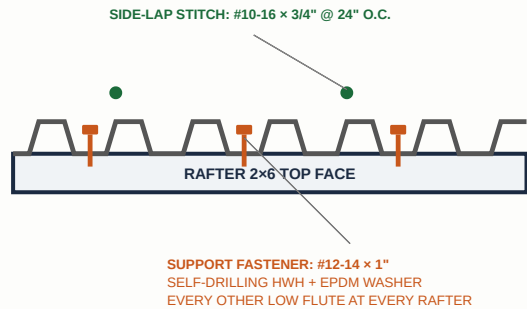

DECK: 1" PROFILE · GALVANIZED · 22'-0" FULL-LENGTH SHEETS (5 SPANS)

Perimeter/edge zone: every low flute. Cut edges cold-galv touch-up.

DETAIL 4 · FOOTING & BASE PLATE ANCHORAGE

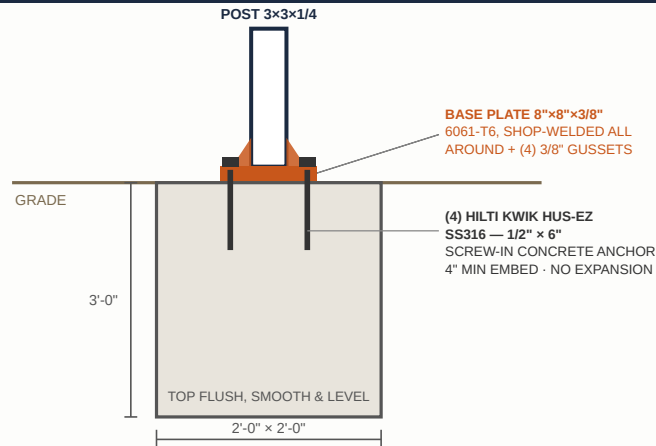

3,000 psi footing poured flush with grade; anchors installed after cure (min 7 days). Typ. 6.

BILL OF MATERIALS — CARPORT B

| Mark    | Member                      | Section                          | Alloy   | Length              | Qty |
|---------|-----------------------------|----------------------------------|---------|---------------------|-----|
| P1–P6   | Column                      | 3" × 3" × 1/4" sq. tube          | 6061-T6 | 13'-6" (field-trim) | 6   |
| R1–R6   | Rafter                      | 2" × 6" × 3/16" rect. tube       | 6061-T6 | 18'-0"              | 6   |
| SB1–SB2 | Side beam (continuous)      | 3" × 6" × 3/16" rect. tube       | 6061-T6 | 20'-0"              | 2   |
| —       | Clip angles (Detail 1)      | 3" × 3" × 1/4" angle × 3" long   | 6061-T6 | —                   | 12  |
| —       | Roof deck                   | 1" profile, 20/22 ga, galvanized | Steel   | 22'-0" (3'-0" cov.) | 6   |
| —       | Footing concrete, 3,000 psi | 2'-0" × 2'-0" × 3'-0"            | —       | 0.45 CY each        | 6   |

FASTENER SCHEDULE — CARPORT B

| Location | Fastener | Qty / Spacing |
|----------|----------|---------------|
|----------|----------|---------------|

|                                   |                                                                                          |                                                                |
|-----------------------------------|------------------------------------------------------------------------------------------|----------------------------------------------------------------|
| Rafter to side beam<br>(Detail 1) | 3/8"-16 SS316 bolt, nylock nut, washers, thru clip angle                                 | 2 per rafter end · 24 total                                    |
| Side beam to post<br>(Detail 2)   | 1/2"-13 SS316 thru-bolt, nylock nut, fender washers                                      | 2 per post · 12 total                                          |
| Deck to rafters (Detail 3)        | #12-14 × 1" self-drilling HWH, bonded EPDM washer                                        | Every other low flute at every rafter;<br>every flute at edges |
| Deck side laps                    | #10-16 × 3/4" stitch screw                                                               | 24" o.c. between rafters                                       |
| Base plate anchors<br>(Detail 4)  | Hilti KWIK HUS-EZ SS316, 1/2" × 6" screw-in concrete anchor (no expansion), 4" min embed | 4 per plate · 24 total                                         |

## GENERAL NOTES

- All aluminum welding with 5356 filler by certified aluminum welder; 1/4" fillet welds unless noted.
- All bolts, nuts, washers and anchor rods stainless steel Type 316. Bolt holes 1/16" oversize, deburred.
- Galvanized deck on aluminum is a compatible (zinc) contact; deck cut edges touched up with cold-galvanizing compound.
- Footing tops poured flush with grade, smooth and level. Anchors installed into cured concrete (3,000 psi, min 7 days) with Hilti-specified bit and torque — screw-in anchors only, no expansion anchors. Isolation barrier (bituminous paint or membrane pad) between aluminum plate and concrete.
- 10'-0" clear entry height verified against owner's tractor (ROPS raised) before fabrication.
- Layout and final grades field-verified with owner before excavation. Structure designed as open (no walls) — do not enclose without review.