



WORK PROPOSAL

Proposal No.: JRG-2026-007

Structural & Ornamental Welding · Aluminum · Steel · Stainless · Exterior Renovation

Date: **August 27, 2026**

13796 SW 139 Ct, Miami, FL 33186 · (786) 804-9010 · [\[Email\]](#) · Lic. [\[License #\]](#)

Valid for: **30 days**

PREPARED FOR

Client: **Raul** [\[Last Name\]](#)

Project Address: **18398 131st Trail N, Jupiter Farms, FL**

Phone / Email: [\[Client Contact\]](#)

PROJECT

Replace the wood railings on both elevated porches with a **custom Chippendale-pattern aluminum railing**, designed and welded by JRG Welding (± 275 LF, 42" high) — an exclusive, permanent, maintenance-free piece.

1. EXISTING CONDITIONS

The wood railings on both elevated porches are weathered and loose, with split cap boards and a heavy, closed picket look. Approximately **275 linear feet** of railing total — perimeter runs, the guard wrapping each stair opening at deck level, and both stair railings — (both decks, approx. 26' × 50' each), guard height **42"**.


2. PROPOSED SOLUTION — CUSTOM CHIPPENDALE ALUMINUM RAILING, 42"

- **Exclusive design, fabricated by JRG Welding:** per the owner's reference photo: runs of straight vertical pickets with a feature box — X corner-to-corner with an inscribed diamond (rombo) — centered in each panel — shop-welded in aluminum; a one-of-a-kind piece made for this property.
- **Construction:** 1"×1" aluminum tube frames with 3/4" aluminum pattern bars, welds ground smooth; **posts at less than 4'-0" on-center per guardrail code** — one pattern module per panel.
- **Powder-coat finish** in the owner's color (matte black / dark bronze as the reference photo, or any standard color) — never rots, never splinters, never repainted.
- **Code-compliant:** 42" guard height with **double top rail** (pattern field dropped below the cap); picket spacing and feature-box openings sized so **no opening accepts a 4" sphere** — final opening sizes verified on the shop drawing before fabrication; posts at less than 4'-0" on-center; engineered post anchoring to the deck framing.

3. SCOPE OF WORK

1. **Demolition:** Remove the existing wood railings on both porches completely (posts, pickets and caps); haul away and legally dispose.
2. **Fabrication & installation:** Shop-weld the custom Chippendale panels and posts in aluminum per the approved shop drawing; powder coat; install with posts anchored to the deck framing with structural hardware — sections level, rigid, corners and terminations finished clean.
3. **Closeout:** Shake-test every section, touch-up, cleanup and walkthrough with owner.

DWG-1 · CUSTOM CHIPPENDALE PANEL — TYPICAL (N.T.S.)

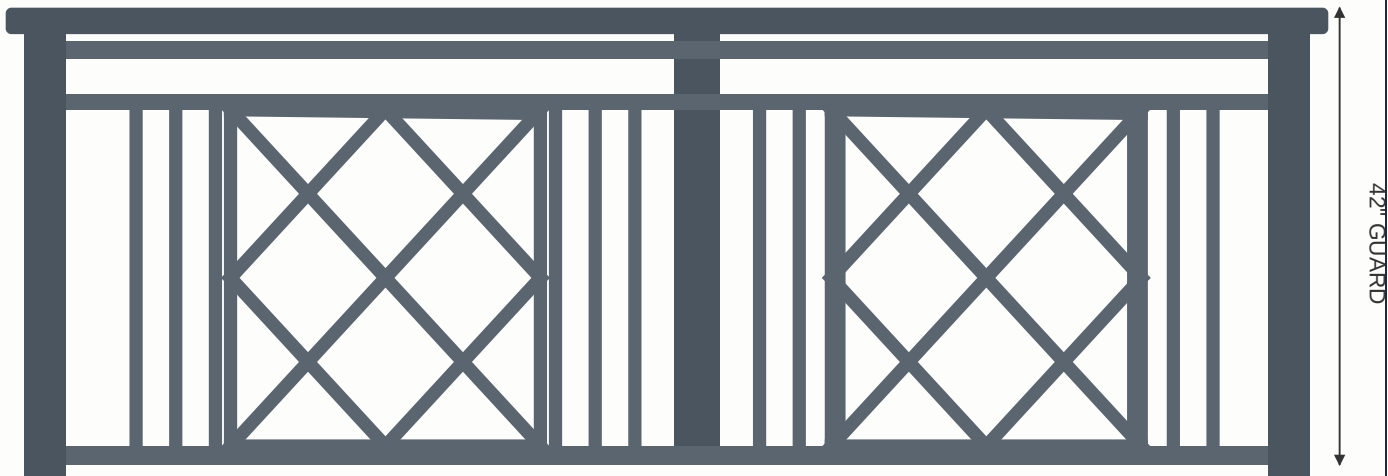

STRAIGHT PICKETS + X-AND-DIAMOND FEATURE BOX · POSTS <4'-0" O.C. · NO OPENING ACCEPTS A 4" SPHERE

Frame: 1"×1" alum. tube · Pattern: 3/4" alum. bar, welds ground smooth · Powder coat: owner's color · 4" sphere rule maintained.

Exclusive design fabricated by JRG Welding — shop drawing approved by owner before fabrication.

4. PRICE

Item	Amount
Custom aluminum railing — both porches, stair-opening guards and both stair railings (±275 LF, 42" high): demolition and disposal of existing wood railings, shop-welded custom panels and posts (pickets with X-and-diamond feature boxes; pickets continue on the sloped stair sections), powder-coat finish in owner's color, structural anchoring and installation — design, materials & labor, exclusive to this home (\$95.00 / LF installed)	\$ 26,125.00
TOTAL — ESTIMATED AT ±275 LF (FIELD-VERIFIED × \$95.00/LF)	\$ 26,125.00

Stair railings and stair-opening guards are INCLUDED in the footage above. Footage is estimated at ~275 LF and field-verified before fabrication; the rate per LF is the contract price. **If this conversion proceeds, the wood railing cap and re-alignment items of Proposal JRG-2026-005 are removed** (that proposal becomes stairs-only, \$1,700).

5. TERMS & CONDITIONS

- **Payment:** [50%] deposit to begin fabrication; balance due upon completion and owner walkthrough.
- **Schedule:** Shop drawing for owner approval, then approx. 3–4 weeks fabrication and powder coat; installation approx. one (1) week on site, weather permitting.
- **Warranty:** One (1) year on workmanship; powder-coat finish per applicator warranty; aluminum fabrication warranted by JRG Welding.
- **Exclusions:** Deck boards and framing (separate proposals), stair rebuild (Proposal JRG-2026-005), lighting, painting of any wood.

JRG Welding Corp — Authorized Signature / Date

Client Acceptance — Signature / Date

JRG Welding Corp · Proposal JRG-2026-007 · Thank you for the opportunity to earn your business.